

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

(54) Title
AUDIO/VIDEO RECORDER/TRANSCIVER

(51)³ International Patent Classification(s)
H04N 005/76

(21) Application No. : 50399/90

(22) Application Date : 27.12.89

(87) PCT Publication Number : WO90/07843

(30) Priority Data

(31) Number	(32) Date	(33) Country
289776	27.12.88	US UNITED STATES OF AMERICA
347629	05.05.89	US UNITED STATES OF AMERICA

(43) Publication Date : 01.08.90

(44) Publication Date of Accepted Application : 03.09.92

(71) Applicant(s)
RICHARD A. LANG

(72) Inventor(s)
RICHARD A. LANG

(74) Attorney or Agent
SPRUSON & FERGUSON, GPO Box 3898, SYDNEY NSW 2001

(56) Prior Art Documents
AU 602386 11945/88 G11B 20/0
AU 481151 53758/73 H04N 5/76
US 4698664

(57) Claim

1. An audio/video transceiver apparatus comprising:
input means for receiving audio/video source
information;

compression means, coupled to said input means,
for compressing said audio/video source information
into a time compressed representation thereof having
an associated time period that is shorter than a time
period associated with a real time representation of
said audio/video source information;

random access storage means, coupled to said
compression means, for storing the time compressed
representation of said audio/video source
information; and

output means, coupled to said random access
storage means, for receiving the time compressed
audio/video source information stored in said random
access storage means for transmission away from said
audio/video transceiver apparatus.

2. An audio/video information transfer network
comprising:

(11) AU-B-50399/90
(10) 627841

-2-

a plurality of audio/video transceivers, coupled via one or more communications links, each of said audio/video transceivers comprising:

input means for receiving audio/video source information;

compression means, coupled to said input means, for compressing said audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said audio/video source information;

random access storage means, coupled to said compression means, for storing the time compressed representation of said audio/video source information; and

output means, coupled to said random access storage means and to one of said one or more communications links, for receiving the time compressed format representation of said audio/video source information stored in said random access storage means for transmission in said burst time period to another one of said plurality of audio/video transceivers.

88. A method for handling audio/video source information, the method comprising:

receiving audio/video source information;

compressing the received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of the received audio/video source information;

storing said time compressed representation of the received audio/video source information; and


transmitting, in said burst time period, the stored time compressed

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: 4 : H04N 5/76	A1	(11) International Publication Number: WO 90/07843 (43) International Publication Date: 12 July 1990 (12.07.90)
(21) International Application Number: PCT/US89/05829 (22) International Filing Date: 27 December 1989 (27.12.89) (30) Priority data: 289,776 27 December 1988 (27.12.88) US 347,629 5 May 1989 (05.05.89) US (71)(72) Applicant and Inventor: LANG, Richard, A. [US/US]; 29209 N. 56th Street, Cave Creek, AZ 85331 (US). (74) Agents: KLIVANS, Norman, R. et al.; Skjerven, Morrill, MacPherson, Franklin & Friel, 25 Metro Drive, Suite 700, San Jose, CA 95110 (US).		(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent). Published With international search report. With amended claims. Date of publication of the amended claims: 26 July 1990 (26.07.90)

627341

(54) Title: AUDIO/VIDEO RECORDER/TRANSCIVER

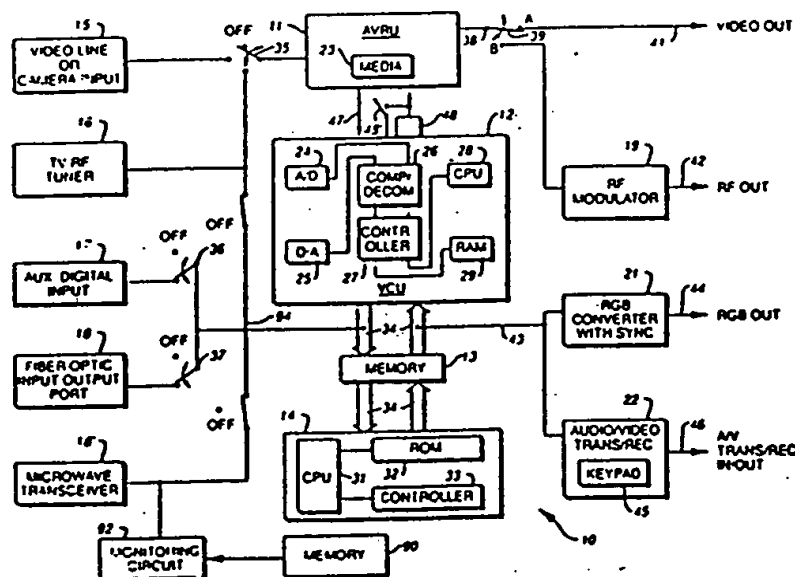

(57) Abstract

An improved video recorder/transceiver (10) with expanded functionality ("VCR-ET") including a capability for storing video and/or audio programs in digital format, editing such programs, transferring such programs onto a hard copy magnetic media in (23) either compressed or uncompressed form and transmitting such programs in compressed form to a remote location using a second VCR-ET (10). The increased functionality is realised through the use of analog to digital conversion, signal compression and intermediate storage in an integrated circuit, random access memory (29). The recorder/transmitter (10) has capabilities to transmit and receive program information in either a compressed or decompressed format over fiber optic lines (18), conventional phone lines or microwaves or electromagnetic waves in radio or TV band.

- 1 -

AUDIO/VIDEO RECORDER/TRANSCIEVER

BACKGROUND OF THE INVENTION

The video cassette recorder (VCR) has added
5 significantly to the usefulness of the home television
set. Important or exceptionally good programs may be
recorded to be viewed again. Programs appearing at times
that are inconvenient for viewing may be recorded for
10 playback at a later time. Recorded movies or other
materials, educational or entertaining, may be rented or
borrowed for viewing at home. (As used in the remainder
of this specification, the term "program" encompasses
movies and other types of video and/or audio materials,
whether broadcast from a TV station or another source.)
15 The typical VCR has its own tuner-receiver and a
video-recorder. It can receive and record a program from
one channel while the television set is being employed to
view a program on another channel. Programs are recorded
on magnetic tape. The tape is then played back and viewed
20 on the television set. Features commonly included in the
VCR are capabilities for advancing the tape forward or
backward at a high speed, stopping motion at any frame to
hold the image, or simply playing back the recording at
normal speed.
25 Desirable features that are not normally available in
a VCR are capabilities for copying recorded programs from
one tape or alternative storage medium to a similar or
dissimilar storage medium, editing recorded programs and
high speed recording. Another desirable, but currently
30 unavailable, feature is the capability for high speed,
high quality transmission and reception by optical fiber,
microwave or other communications means using the VCR.

SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention there is disclosed an audio/video transceiver apparatus comprising:

- input means for receiving audio/video source information;
- 5 compressing means, coupled to said input means, for compressing said audio/video source information into a time compressed representation thereof having an associated time period that is shorter than a time period associated with a real time representation of said audio/video source information;
- 10 random access storage means, coupled to said compression means, for storing the time compressed representation of said audio-video source information; and
- output means, coupled to said random access storage means, for receiving the time compressed audio/video source information stored in
- 15 said random access storage means for transmission away from said audio/video transceiver apparatus.

In accordance with another aspect of the present invention there is disclosed a method for handling audio/video source information, the method comprising:

- 20 receiving audio/video source information;
- compressing the received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of the received audio/video source information;
- 25 storing said time compressed representation of the received audio/video source information; and
- transmitting, in said burst time period, the stored time compressed representation of the received audio/video source information to a selected destination.



100/15470

~~SUMMARY OF THE INVENTION~~

A video recording device constructed in accordance with my invention is adapted to receive a video program at an accelerated rate and store that video program in a first memory for subsequent viewing. In one embodiment, the video program is received via a fiber optic port, a microwave transceiver, an RF receiver, or other input means. The video signal is typically a digital compressed video signal which may be provided by another video recording device in accordance with the invention or a centrally located video library.

(In another embodiment, instead of receiving a video signal, the recording device receives an audio signal at an accelerated rate. The audio signal may be stored so it can be edited or listened to thereafter.)

The video recording device typically includes an editor for editing the digital compressed video signal stored in memory.

The video recording device also includes compression/decompression circuitry for decompressing a compressed digital video signal and converting the decompressed digital video signal to an analog video signal for subsequent viewing. In one embodiment, the video recording device also includes a second memory (which can be, for example, a magnetic tape cassette, optical disc, or other recording media) for receiving the decompressed analog video signal for subsequent viewing.

In one embodiment, the video recording device includes input means for receiving a video signal at conventional speeds, such as an RF tuner used to receive conventional analog video signals, a camera input line for receiving an input signal from a TV camera, or other type of input means. The signal received by this input means can be stored in the second memory, and/or digitized,

ITALIAN

compressed and stored in the first memory, and/or viewed on a television monitor.

In another embodiment, the video recording device can receive digital video signals at conventional speeds as well.

These and other advantages of my invention are better understood with reference to the drawings and detailed description below.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 is a perspective view of the housing of the audio/video recorder editor/transceiver ("VCR-ET") disclosed and embodying the invention.

Fig. 1A is an enlarged view of the circled area of Fig. 1.

15 Fig. 2 is a functional block diagram of the VCR-ET of Fig. 1.

Fig. 2A is a functional block diagram of the VCR-ET of Fig. 1 including circuitry for demodulating a video signal encoded using the Vokac technique.

20 Fig. 3 is a functional block diagram of a VCR-ET in accordance with another embodiment of the invention.

Fig. 4 is a functional block diagram of an audio recorder/transceiver constructed in accordance with the invention.

25 Fig. 5 illustrates a plurality of VCR-ET's adapted to receive video signals from a remotely located video library via a common communication channel.

Fig. 6 illustrates a carrier signal modulated using the Vokac modulation technique, described in greater
30 detail below.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to the drawing by reference characters, Figs. 1 and 2 illustrate an improved audio/video recorder

editor/transceiver 10 (VCR-ET) comprising an audio/video recording unit (AVRU) 11, a video control unit (VCU) 12, memory 13, digital control unit (DCU) 14, video line or camera input line 15, TV RF tuner 16, auxiliary digital input port 17, fiber optic input/output port 18, RF modulator 19, RGB converter with synchronizer 21, and an audio/video transmitter/receiver 22 with keypad 45, all in a common housing.

The audio/video recording unit AVRU 11 may be a video cassette recorder similar to a conventional VCR in which the storage media 23 is a magnetic tape. Alternatively AVRU 11 may operate with other types of storage media including, but not limited to, optical discs, CD-ROMs or other magnetic tape formats. AVRU 11 has all the functions of the typical VCR including record, play, rewind, slow motion, fast-forward and single frame hold.

An alternate form of storage media for use in AVRU 11 is the CD-ROM, which is a disk using a derivative of glass or plastic in conjunction with an aluminum or other metallic coating. Audio and video signals are stored in the form of irregularities in the aluminum coated surface and are read using a low power laser. In this case, the user would not be able to store or write on the CD-ROM, but would be able to play discs that have been recorded and distributed commercially. The storage of video and audio signals on the CD-ROM is in digital form which is readily accommodated by the video recorder of this invention.

Instead of using a CD-ROM, VCR-ET 10 can use optical discs as media 23. Such optical discs are similar to a CD-ROM and use a variable power laser to read from or write on the disc.

A first type of optical disc is a WORM (Write Once Read Many) optical disc. This device has the unique capability of writing on the disc permanently. A laser is

used to change the magnetic or optical properties of the media. A lower-powered laser is then used to read the data from the disc. Data, in this case, is permanently recorded; it may neither be erased nor written over. A
5 further description of this technology can be found in the November 1988 issue of The Electronic System Design magazine (ESD) pages 55-56, incorporated herein by reference.

10 A second and preferred type of optical disc to be used in AVRU 11 is an erasable optical disc. This disc has full read/write/erase capabilities. With this disc, AVRU 11 has the same record/playback capabilities as a conventional VCR. As an example, erasable optical discs are used in Steven Jobs' "Next" machine as described in
15 Infoworld, Volume 10, issue 42, pages 51 and 93, October 17, 1988, incorporated herein by reference. In addition, the random access capabilities of the erasable disc (and of the CD-ROM and WORM) provide additional benefits as will be discussed in a later part of this
20 specification.

A key element of VCR-ET 10, which is partly responsible for its improved functionality, is the video control unit or VCU 12. The VCU comprises an analog to digital converter (ADC) 24, a digital to analog converter
25 (DAC) 25, a compressor/decompressor 26, a controller 27, a central processing unit (CPU) 28 and a random access memory (RAM) 29. VCU 12, using these elements, accomplishes the digitization and compression of analog signals as well as the reverse process in which the
30 compressed digital signals are decompressed and converted back to analog signals.

As a first step in the processing of the composite video signals within VCU 12, the sync signals are decoded to isolate signals for each picture frame for processing.
35 The video signals defining each frame may then be

- 6 -

converted to a red analog signal, a green analog signal, and a blue analog signal in a conventional manner. The red, green and blue analog signals are then converted to digital form by the analog to digital converter (ADC)

5 24. The frame is divided into a set of closely positioned rows and columns of picture elements or "pixels." Each pixel has a color defined by a set of three digital values defining strength of the primary color components, red, green and blue (RGB) respectively. In one embodiment, 10 each frame is divided into an array of 300 by 300 pixels, with the color and luminance of each pixel being defined by a seven bit word for the red component, a seven bit word for the blue component, and a seven bit word for the green component. These words are generated by ADC 24. 15 The RGB video signal may also be processed by means of hue-saturation-intensity (HSI) color processing, where appropriate, as described in "Chips for Real-Time Comparisons," Electronic Engineering Times, issue 525, February 13, 1989, page 122.

20 If each frame includes 90,000 pixels (300 x 300), and each pixel is defined by 21 bits (7 bits per primary color), the digital representation of a single video frame utilizes a sizable block of digital information (i.e., 1.89 megabits/frame) which must be processed very 25 rapidly. (Approximately 30 frames/second are received from AVRU 11.) Fortunately the analog to digital conversion of these signals may be accomplished at the desired speed using commercially available analog to digital converter integrated circuits. The analog to 30 digital converter 24 (ADC) is a high-speed, high-accuracy, A to D "flash" converter available as a single IC (integrated circuit). Several different types of such A/D converters are available from Burr-Brown, one of which is the ADC 600. Part number TIC024, manufactured by 35 Tektronix, Inc. is also appropriate. Other types of

devices appropriate for this function are described in an article by K. Rogers entitled "8-bit A/D Flash Hits 500 Msamples", Electronic Engineering Times, Dec. 12, 1988, page 90, incorporated herein by reference.

5 Compression of the digital data defining a video frame and the reverse process (decompression) are accomplished by compressor/decompressor 26. Various algorithms may be employed in the compression process which enable the representation of a series of numbers by
10 a reduced number of digits. As an example, compression algorithms like CCITT Group IV may be used.

 In one optional embodiment, to further reduce the amount of memory required to store a program, the compression algorithm can simply record data corresponding
15 to only those pixels which change color from one frame to the next. This results in considerable memory space savings, since not all pixels change color each frame. Basing calculation upon 10% of the pixels changing from one frame to the next, it is estimated that memory
20 requirements using this technique are cut by about 90%. It is also estimated that on the average, the CCITT Group IV algorithm can cut memory requirements by another 95%. Thus, if no data compression technique is used, it would take approximately 51.03 gigabytes to store a 2 hour
25 video program, but by using the above compression techniques, it is estimated that memory 13 will require only 250 megabytes.

 Controller 27 handles timing and aids in the communication between the different elements of VCU 12,
30 and between VCU 12, AVRU 11 and memory 13.

 In one embodiment, the audio portion of the program is periodically sampled and digitized by analog to digital conversion. In one embodiment, this is done at a sample rate of 88,000/second, on byte p r sample, to yield
35 compact disc quality sound. The sampling rate could be

- 8 -

dropped to reduce memory requirements. Also, the audio data can be compressed with conventional algorithms.

The process of converting either from analog to digital or from digital to analog requires memory for intermediate storage. Random Access Memory (RAM) 29 serves in this capacity. For this purpose either a DRAM (Dynamic RAM) or a SRAM (static RAM) may be employed. An example of a DRAM is the TI (Texas Instruments) TMX4C1024; an example of a SRAM is the INMOS IMS-1203. RAM 29 should have sufficient capacity to store at least two full uncompressed frames (e.g., about 472 KB).

The CPU (Central Processing Unit) 28 is a micro-processor which controls the digitization process of VCU 12. CPU 28 works with controller 27 to control and communicate with the other elements of the VCU. There are numerous commercially available microprocessors that are appropriate for this application. The Intel 80286, Intel 80386, Motorola 68020, and Motorola 68030 are examples. A more complete description of the microprocessors can be found in the October 27, 1988 issue of Electronic Design News (EDN), pages 231 and 242, incorporated herein by reference, or in the applicable data sheets.

Controller 27, CPU 28 and RAM 29 serve in the same manner during the reverse processes, i.e., decompression and digital to analog conversion. Decompression is first accomplished in compressor/decompressor 26. The decompressed digital signal is then converted to an analog signal by digital to analog converter (DAC) 24 (assuming its destination requires an analog form). In the course of converting the decompressed signals from the VCU 12 for use by the AVR 11 the signals are synchronized by the time base generator (TBG) or corrector 48. TBG generator 48 inserts synchronization pulses into the signal provided by VCU 12 to identify individual raster scan lines and frames so that the resulting signal can be used by a

conventional television set or VCR. TBG 48 can be bypassed by shunt switch 48' for the purpose of transmitting either compressed or decompressed signals from VCU 12 directly to the AVRU 11 in an uncorrected time based mode.

DAC 25 provides the inverse of the function performed by A/D converter 24. DAC 25 is a high-speed, high accuracy digital to analog converter. An example of such a converter is the Burr-Brown DAC60 digital to analog converter.

Different types of memory technologies are adaptable for use in memory 13. As mentioned earlier, DRAM and SRAM semiconductor memories are commonly used for applications of this type and are readily available.

One type of random access memory is CMOS (Complimentary Metal Oxide Semiconductor). The CMOS memory has the advantage of a relatively low power requirement and is readily adaptable for use with battery backup for semi-permanent data storage. Other types of memory include the above mentioned optical disc memories, bubble memories and magnetic discs. Another appropriate data storage media may be "Digital Paper" available from ICI Image data of Wilmington, Delaware.

Emerging memory technologies may also prove advantageous with capabilities for mass data storage in even smaller physical dimensions.

Digital Control Unit (DCU) 14 comprises a CPU (Central Processor Unit) 31, a ROM (Read Only Memory) 32 and a controller 32. DCU 14 is responsible for all of the digital editing processes. Through the use of DCU 14, video segments may be edited and rearranged. Thus, one may use DCU 14 to rearrange the scenes in a program, alter the program sound track, etc.

In addition, a program may be edited, one frame at a time, by changing the contrast, brightness, sharpness,

- 10 -

colors, etc. (Alteration of the contrast, brightness, sharpness and colors can be automated as well.) In one embodiment, images can be rotated, scaled (i.e., made larger or smaller), etc. In addition, pixel by pixel editing can be accomplished by DCU 14, e.g., in a manner similar to a PC paint program. Similar editing features can be incorporated for the audio portion of each program. In one embodiment, a display such as a flat panel video display (not shown) is built into the VCR-ET. A user interface control panel of DCU 14 allows a user to select a desired frame number from a menu on the display. The VCR-ET then displays a strip of frames (including several frames before and after the selected frame). The user can delete frames in a strip, select a point where other frames are to be inserted into the program, or edit different frames (i.e., alter contrast, brightness, sharpness, colors, etc.). In one embodiment, a user input device such as a light pen or mouse can be used to select individual frames in a strip for editing.

Instead of incorporating a flat display into VCR-ET 10, in another embodiment, a television coupled to output lead 42 of RF modulator 19 can be used during editing.

CPU 31 is a microprocessor of the type described in connection with the CPU 28 of VCU 12. Controller 33 is an integrated circuit which handles the timing and interfacing between DCU 14 and memory 13. ROM 32 holds the necessary step-by-step editing programs which are installed at the factory. A currently available example of a suitable ROM for this application is the Texas Instruments part TMS47256. CPU 31 and controller 33 together control the editing process as they execute the programs stored in ROM 32.

The VCU 12, memory 13 and DCU 14 communicate with each other via a high speed data bus 34. The high speed data bus is required in order to meet bandwidth

requirements. Examples of suitable data bus devices are Motorola's VME bus, Intel's Multibus and the Optobuss (U.S. Patent 4,732,446).

A video line or camera input line 15 is provided to
5 enable VCR-ET 10 to receive an input signal from a source
such as a television camera, a conventional VCR, a
television tuner, or another VCR-ET, etc. The signals
received at input line 15 are typically carried by a
coaxial cable and are in the form of a standard television
10 composite signal. As used throughout this specification,
the words "standard television composite signal" or its
acronym STCS shall be read to include any one of the
following: NTSC, PAL, SECAM, HDTV, or any American or
European broadcast signal standards. (NTSC, PAL and SECAM
15 are discussed in "Reference Data for Radio Engineers",
published by Howard W. Sams & Co. in 1983, incorporated
herein by reference.) An NTSC composite signal is defined
as the analog signal that carries the chrominance (color),
luminance (brightness), synchronization (timing) and audio
20 signals that make up the video signals received and
displayed by television and video cassette recorders.
These four components are combined into one signal by
modulating the components in different ways. (Amplitude
modulation and phase modulation are examples.) The
25 standard video line signal is such a composite signal and
may be received at input line 15 from one of the above-
mentioned sources.

TV RF tuner input port 16 also supplies a composite
signal as described in regard to video input line 15. The
30 difference is that this signal is received from an antenna
or cable TV coaxial cable. To receive such a signal,
tuner 16 is capable of being set or tuned to receive the
desired carrier frequency or television channel.

Selector switch 35 is provided to select either video
35 input line 15 or TV RF tuner 16 as an input signal source

- 12 -

to AVRU 11.

Auxiliary digital input port 17 is employed to receive any acceptable digital signal such as a computer-generated video signal or as may be supplied by another VCR-ET. This signal, for example, may be an RGB video signal such as that delivered to computer monitors, or it may be a digitized audio signal. (As mentioned above, an RGB signal is a signal which communicates the strength of the red, green and blue color components for the pixels that make up each video frame.) Switch 36 selects whether the digital video/audio input signal is chosen from auxiliary digital input port 17. Switch 36 supplies the selected signal to high speed data bus 34 which carries the signals in digital form.

Fiber optic port 18 incorporates a fiber optic transceiver. Port 18 is capable of transforming fiber optic (light) signals to electrical signals or transforming electrical signals to fiber optic signals. Port 18 thus provides a capability for two-way communication between high speed data bus 34 and a fiber optic signal line. The incorporation of fiber optic port 18 in the VCR-ET provides a capability for receiving audio/video signals from or delivering audio/video signals to the fiber optic line such as a fiber optic telephone line. The fiber optic line carries digital signals in the form of light waves over great distances with a high degree of accuracy and reliability and at a high speed (e.g., about 200 megabytes/second). The VCR-ET can receive/transmit a video program at an accelerated rate via fiber optic port 18 from/to a variety of sources. For example a video program may be communicated at an accelerated rate from the first VCR-ET to a second VCR-ET in less time than it would take to view the program. Thus, it is not necessary to access the optical fiber for long periods of time in order to transmit a long video

program.

(Using fiber optic port 18, a movie can be downloaded in less than 10% of the time require to view the movie, and typically less than 1% of the time required to view
5 the movie.) Thus, it is not necessary to access the optical fiber for long periods of time in order to transmit a long video program. Switch 37 is provided to select connection to the fiber optic input/output port 18. An OFF or open position is provided. The selected
10 signal is delivered to or supplied from high speed data bus 34.

Switch 37 is provided to select connection to the fiber optic input/output port 18. An OFF or open position is provided. The selected signal is delivered to or
15 supplied from high speed data bus 34.

Analog output signals from AVRU 11 are delivered to the common terminal 38 of a selector switch 39. When set to position A, switch 39 delivers the output signal of AVRU 11 directly to a video output line 41 as a standard
20 STCS composite signal; when set to position B switch 39 delivers the output of AVRU 11 to the input of RF modulator 19. Modulator 19 converts the video signal to an RF-modulated composite signal for delivery to such devices as televisions and conventional VCR's. These
25 types of devices play back the video program on a particular frequency channel (such as channel 4) on the television. Delivery to the television or VCR is via RF output line 42.

Digital output signals from VCR-ET 10 may be
30 dispatched from high speed data bus 34 via line 43 to input leads of RGB converter 21 and audio/video transmitter/receiver 22.

RGB converter 21 converts the STCS signal into an RGB signal as required by computer monitors and similar
35 display devices. The converted signal is received by a

- 14 -

display device connected to RGB converter output line 44. (In another embodiment, digital signals may be dispatched from high speed data bus 34 via line 43 to the input lead of RGB converter 21.)

- 5 VCR-ET 10 includes audio/video transmitter/receiver 22 which is typically a built-in modem. Advantageously, the modem may be used to communicate an audio/video program over conventional phone lines in a manner similar to that described above with respect to optical fibers.
- 10 The modem allows transfer of the audio/video signal in a digital format over the standard telephone line. Modems are commonly available for computers and are currently available in the form of a single integrated circuit. As an example, Sierra Semiconductor offers a 2400 baud single
- 15 chip modem as part number SC111006. Representative manufacturers of these single modem IC's can be found in the April 14, 1988 issue of Engineering Design News (EDN), pages 124-125. Some of these single IC modems have the added capability of generating the tones for dialing a
- 20 phone number. The destination phone number may be entered by means of an optional keyboard/keypad 45 incorporated in the video recorder 10 of the invention. Output port 46 of transmitter/receiver 22 connects directly to the telephone line.
- 25 Also associated with Modem 22 is an auxiliary keyboard 45' (Fig. 1A) of buttons for commanding the modem to perform tasks such as starting a transmission over phone lines (45a), terminating a transmission (45b), automatic telephone answering to receive transmissions
- 30 (45c), using an optional speaker (not shown) to monitor phone lines (45d), using an optional microphone (not shown) to speak over the phone lines (45e) and for controlling the baud rate (45f).

The application and utilization of the VCR-ET may

35 include a number of forms or operating modes. In its

first and simplest operating mode, AVRU 11 may be operated in the manner of a conventional VCR with signals from an antenna being received by tuner 16 and recorded directly on media 23 in analog form. At the same time the received
5 program may be viewed on the television screen with the television connected at video output terminal 42. An optional signal source for this type of operation is the video line or camera input line 15 selectable by switch 35.

10 In a second operating mode a program stored in media 23 of AVRU 11 may be played back and viewed on the connected television set.

When it is desired to copy a program from one recording media to another, the recording media holding
15 the desired program is installed in the AVRU. The recording media is then played back with optional viewing on a connected television set or other TV monitor and/or listening through speakers (as appropriate). As the recording media is played back, the analog signals from
20 the recording media (video and/or audio) are dispatched to VCU 12 via connection 47. The analog signals are converted to digital signals by ADC 24, compressed by compressor/decompressor 26 and the compressed digital signals are stored in memory 13. The foregoing operations
25 are accomplished under the control of controller 27 and CPU 28. RAM 29 is used for interim data storage during this process. Once the complete video/audio program has been stored in memory 13, the recording media from which the stored program has just been read is replaced by blank
30 recording media upon which the stored program is to be copied. CPU 28 in cooperation with controller 27 and RAM 29 then executes the decompression and digital to analog conversion of the program stored in memory 13, decompression taking place in compressor/decompressor 26,
35 and digital to analog conversion being accomplished by DAC

- 16 -

25. The resulting analog program is stored on the blank recording media which constitutes media 23 of AVRU 11.

In an alternate mode of operation, the decompression circuitry of VCU 12 can be bypassed. Thus, a user has the option of downloading the stored program from memory 13 onto recording media 23 in compressed digital format. The user can then reload the program from media 23 into memory 13 at a future time for viewing, editing or recording back onto recording media 23 in analog form. This capability allows the user to quickly clear memory 13 for other interim uses and also provides the user with a hard copy of the program in digital format. The hard copy in compressed digital format has a number of uses, e.g. it could be archived for later viewing, transmitted by an appropriate independent transmitter, etc.

During the foregoing procedures, DCU 14 may be utilized for editing operations. As the program is being read from the first or original recording media, it is simultaneously viewed on the TV screen, or listened to by means of an audio monitor, converted to digital signals, compressed and stored in memory 13. Once the digital audio/video program is stored in memory 13, editing is accomplished by the user through control of DCU 14, by means of a control panel (not shown) coupled to DCU 14. If desired, additional audio/video signals may be simultaneously entered into memory 13 and added to those received from VCU 12. The additional signals may be introduced from auxiliary digital input port 17 or from fiber optic input/output port 18 and may comprise video captions to be superimposed upon the stored video images, or they may be audio commentaries to be added to silent video presentations. In addition, as mentioned above, the order in which various segments appear in the video programs may be altered. Certain undesired segments, such as TV commercials, may be removed. This editing operation

is accomplished under the control of DCU 14.

In still another operating mode, a program stored in media 23 of AVRU 11 or being received by AVRU 11 from input line 15 (as from a video camera) may be digitized and compressed by VCU 12 and routed via bus 34, to memory 13. The data from memory 13 is then routed to line 43, transmitter/ receiver 22 and to a telephone line (or to fiber optic port 18 and to an optical fiber). At the other end of the telephone line (or optical fiber) the signals received are processed by another VCR-ET.

Once received in the second VCR-ET's memory 13, the digitized program can then either be viewed directly from memory or transferred to storage medium 23, either in its entirety or in random segments, based on user preference.

In the case of video camera input at input 15 the transmitted signals may comprise a live transmission. Alternatively the transmitted program may be derived from a program stored in media 23 of AVRU 11. In this case the stored analog program is again decoded, digitized, compressed and transmitted via bus 34 to memory 13. The data in memory 13 is then communicated via line 43 and transmitter/receiver 22 to telephone lines or other output means (e.g. fiber optic port 18).

It follows, of course, that digitized video and audio signals from the remote VCR-ET at the other end of the telephone line may be received at line 46, entered into memory 13 via transmitter/receiver 22, converted to analog signals by VCU 12, and recorded on media 23 and then viewed, if desired, on a television set connected at output 42. A hard copy of the program may also be made for later viewing.

As mentioned earlier, when any of the foregoing operations entail the processing of unmodulated video signals, such signals must first be processed by RF modulator 19 before they can be accepted by devices such

- 18 -

as a conventional VCR or television set; when the monitoring means is a computer monitor or a similar display device the signals are processed by RGB converter 21.

5 All of the foregoing operations are performed with enhanced quality and efficiency by virtue of the digital, rather than analog, storage and transmission modes and the compressed data storage mechanism, with additional advantages of improved cost and reliability afforded in
10 the case of tape to tape (or other media to media) program transfers by virtue of the requirement for only a single tape deck or other storage device.

In an alternative embodiment, either in place of fiber optic port 18 or in addition to fiber optic port 18,
15 a microwave transceiver 18' is provided for transmitting and/or receiving a video program via microwave. In conventional microwave technology, satellite systems and microwave transmitters transmit data using a low power/high frequency signal. In an embodiment of the
20 invention designed to receive microwaves, transceiver 18' includes an amplifier for amplifying the microwave signal and a demodulator for obtaining the video program signal from the microwave signal. Receiving, amplifying and demodulating the microwave signal can be accomplished with
25 conventional microwave transceiver equipment. The video program signal is typically in compressed digital form, and may be stored, viewed or edited as in the above-described embodiments. Video program data from memory 13 can also be transmitted by the microwave transceiver,
30 thereby providing the capability for microwave transmission of stored video programs in compressed digital format. Thus, the invention can be used to receive and transmit programs via microwaves at an accelerated rate similar to and about as fast as, the
35 transmission and reception of programs over optical

fibers. This feature allows transmission and reception of programs in a few minutes or seconds using currently available technology. Both point-to-point microwave transceivers and satellite transceivers may be used.

5 In one embodiment, VCR-ET 10 receives video programs which are downloaded from a remotely located video library 100 (Fig. 5) at an accelerated rate via microwave transceiver 18'. After downloading, the program may be viewed, stored in memory, edited and/or a hard copy of the
10 program may be made on magnetic tape, optical disk, etc. Thus, a VCR-ET owner who subscribes to video library 100 may request (via telephone or other means) that a particular film be downloaded via microwave to the subscriber's VCR-ET, e.g., VCR-ET 10. Other subscribers
15 may simultaneously request that other movies be downloaded into their VCR-ET's 10a to 10d (Fig. 5) via microwave. Library 100 transmits a video signal corresponding to the various movies requested by various users in series.

In one embodiment, each VCR-ET includes a memory
20 device 90 (shown in phantom in Fig. 2) for storing a subscriber's identification code unique to that VCR-ET. As the video library broadcasts signals via microwaves, prior to commencement of each signal corresponding to a movie (or other video program), the library broadcasts a
25 preamble signal including the subscriber's code corresponding to the VCR-ET for whom the movie signal is intended. Each VCR-ET includes a monitoring circuit 92 for monitoring the microwave signal received by microwave transceiver 18'. When transceiver 18' receives a preamble
30 signal corresponding to the subscriber code stored in memory device 90, VCR-ET 10 stores the video signals received thereafter in memory 13 for subsequent viewing. In this way the video library may broadcast, in series, compressed video signals at an accelerated rate to be
35 downloaded into VCR-ET's owned by various subscribers. If

- 20 -

a plurality of subscribers request the same film, the library broadcasts a signal preamble containing the plurality of subscribers' codes corresponding to the VCR-ET's of each subscribing VCR-ET owner who requested
5 that film, so that each requesting subscriber simultaneously receives the requested film. In one embodiment, the VCR library prioritizes the order in which films are broadcast based upon the number of subscribers requesting each film.

10 In another embodiment, a plurality of VCR-ET's are coupled via their optical fiber port 18 and a common optical fiber to the video library. In yet another embodiment, instead of receiving signals from the video library using microwaves or optical signals, such video
15 signals are received via radio waves of a frequency such as are used to communicate conventional television signals. In one such embodiment, these radio wave signals are modulated using a technique described in U.S. patent 4,613,974, issued to Vokac et al. on September 23, 1986,
20 and incorporated herein by reference. In the Vokac modulation technique, the sine waves that make up the radio signals are modified to include what Vokac refers to as "audel levels" i.e. a relatively flat signal portion 110 between the peaks 112 and troughs 114 of the sine
25 waves (see Figure 6). In one embodiment, TV RF tuner 16 is coupled to Vokac demodulation circuitry 16 (Fig. 2A) which is capable of demodulating signals encoded using Vokac's technique, and downloading these signals via lead 94 to memory 13.

30 The use of Vokac's technique in this embodiment is important because Vokac's technique allows for a single carrier signal to be modulated by two other signals. A first of these two other signals is used to modulate the carrier to encode data by introducing into the carrier
35 Vokac's "audel levels" 110. In addition, the carrier may

be phase, amplitude or frequency modulated using the second other signal. In this way, an electro-magnetic carrier signal in the radio or television band may be encoded with two information signals. The first of these
5 signals may be a conventional commercial television program, impressed upon the carrier signal via phase modulation (or frequency or amplitude modulation) and destined for televisions owned by people who do not subscribe to the video library. The second signal may be
10 audel-level encoded with data corresponding to a compressed digital video signal destined for subscribers, whose VCR-ET decodes the audel levels (using the circuitry disclosed in the Vokac patent) and loaded into memory 13
for subsequent viewing.

15 As described in the Vokac patent, between each peak 112 of Vokac's signal and an audel level is a first portion 116 of a first transition region, and between each audel level and a signal trough is a second portion 118 of the transition region. When demodulating signals
20 modulated with Vokac's technique, the demodulation circuitry may be responsive to the slope of the first and second portions 116, 118 of the transition regions, or it may be responsive to the magnitude of the audel level 110, directly.

25 In the embodiment in which compressed video signals are transmitted by an electro-magnetic carrier signal in the radio or television band, monitoring circuit 92 may be coupled to TV RF tuner 16 instead of microwave transceiver 18'.

30 Fig. 3 illustrates an alternative embodiment invention in which AVRU 11 is not integral with VCU 12, memory 13 or editor 14. In this embodiment, AVRU 11 is a conventional, commercially available VCR which receives a modulated video input signal on an input cable 50. In
35 this embodiment AVRU 11 includes a RF tuner 51 for

- 22 -

demodulating the input signal so it can be stored in media 23. AVRU 11 also includes a RF modulator 52 for modulating the signal received from media 23 and providing the RF modulated output signal on an output cable 53, 5 which can be coupled to a television set. (TV RF tuner 51 and RF modulator 52 are provided in typical commercially available VCR's.) A switch 54 is provided to couple input cable 50 to output cable 53 when media 23 is not serving as a video signal source. The VCR-ET of this embodiment 10 includes a TV RF tuner 55 which receives and demodulates the signal on cable 53, and provides the resultant analog audio/video signal on a lead 56, which is digitized and compressed as described above. In this alternative embodiment, the digitized compressed signal may be 15 processed as described above, e.g. stored in memory 13 (via high speed bus 34), edited, transmitted by the fiber optic port 18 to another VCR-ET, etc. When it is desired to view a program stored in memory 13, data from memory 13 is decompressed and converted to an analog signal by 20 VCU 12, and the resulting signal is provided on an output lead 57 to a RF modulator 58, which modulates the video signal so that it can be received and stored by AVRU 11 or viewed on a television coupled to cable 53. (As mentioned above, in the Fig. 3 embodiment, AVRU 11 is a conventional 25 VCR.)

One advantage of the embodiment of Fig. 3 is that many people already own VCR's. Rather than buying apparatus which duplicates much of the hardware already present in their VCR, the embodiment of Fig. 3 would 30 provide to owners of conventional VCR's capabilities which are otherwise currently unavailable.

In one embodiment, analog auxiliary audio and video input terminals 62, 64 are provided so that analog signals may be provided by alternate sources to VCU 12.

35 The embodiments described include means for

receiving, storing and transmitting both audio and video signals. However, the invention encompasses apparatus which can store and transmit video signals only and apparatus which can store and transmit audio signals only. An embodiment designed to store and compress audio signals is illustrated in Fig. 4. Referring to Fig. 4, an audio signal source 70 (a tape recorder, microphone, record player, etc.) is coupled to a digitizer and compressor circuit 72, which converts the analog signal to a digital signal and compresses the digital signal in a manner similar to VCU 12 described above. (Audio signal source 70 may also be a CD player which provides digital audio signals, in which case circuit 72 merely compresses but does not digitize the CD player output signal.) The digital compressed signal can then be stored in a memory 74. Of importance, data from memory 74 can be transmitted by a fiber optic transceiver 76, or by a microwave transceiver 78 at an accelerated rate. This is important not only in a home entertainment application, but in other applications as well. For example, a user can dictate an audio presentation and send it to a remote location (e.g. an office) at an accelerated rate without having to monopolize the transmission medium (e.g. the fiber optic cable) for an extended length of time.

25 The business uses of the embodiment illustrated in Fig. 4 makes home offices feasible for many workers now confined to more traditional offices and also opens new possibilities to business people who are traveling.

In the embodiment of Fig. 4, data can also be loaded from memory 74, via a modem 79 over a conventional phone line 80. Data can also be received from phone line 80, fiber optic transceiver 76 or microwave transceiver 78, loaded into memory 74, and converted to an analog signal by circuit 72, to be listened to via an audio monitor 82, or to be stored on an audio tape cassette 84 or other

- 24 -

storage media.

An editor 86 is optionally provided so that the data in memory 74 may be edited, e.g., by rearranging the order of portions of the audio program, increasing or decreasing
5 the volume of portions (or different frequency components) of the audio program, or enhancing the audio program through filtering techniques (e.g. to remove static and noise).

It will be apparent to those skilled in the art that
10 various changes and modifications may be made to the above-described embodiments without departing from the spirit of the invention or from the scope of the appended claims. For example, the VCR-ET can be constructed so as to be portable. Thus, it could be carried to a location
15 where it is desired to record a program with a video camera, and used to edit the program after it is recorded. Also, in one embodiment, video library 100 can download video programs via optical fiber or other means. Also, in other embodiments, an audio library is
20 provided to download digital compressed audio signals. Other modifications will be apparent to those skilled in the art in light of the present specification.

The claims defining the invention are as follows:

1. An audio/video transceiver apparatus comprising:
input means for receiving audio/video source
information;

5 compression means, coupled to said input means,
for compressing said audio/video source information
into a time compressed representation thereof having
an associated time period that is shorter than a time
period associated with a real time representation of
10 said audio/video source information;

random access storage means, coupled to said
compression means, for storing the time compressed
representation of said audio/video source
information; and

15 output means, coupled to said random access
storage means, for receiving the time compressed
audio/video source information stored in said random
access storage means for transmission away from said
audio/video transceiver apparatus.

20 2. An audio/video transceiver apparatus as in Claim
1 further comprising editing means, coupled to said random
access storage means, for editing the time compressed
representation of said audio/video source information
stored in said random access storage means and for
25 restoring the edited time compressed representation of
said audio/video source information in said random access
storage means; and wherein said output means is operative
for receiving the edited time compressed representation of
said audio/video source information stored in said random
30 access storage means for transmission away from said
audio/video transceiver apparatus.

3. An audio/video transceiver apparatus as in Claim
2 further comprising monitor means for enabling the user
to selectively identify the time compressed representation
35 of said audio/video source information stored in said



random access storage means during editing.

4. An audio/video transceiver apparatus as in Claim
1 wherein said output means comprises a fiber optic output
port for coupling said audio/video transceiver apparatus
5 to a fiber optic transmission line.

5. An audio/video transceiver apparatus as in Claim
1 wherein said output means comprises a modem for coupling
said audio/video transceiver apparatus to a telephone
transmission line.

10 6. An audio/video transceiver apparatus as in Claim
1 wherein said random access storage means comprises an
optical disc.

7. An audio/video transceiver apparatus as in Claim
1 wherein said random access storage means comprises a
15 semiconductor memory.

8. An audio/video transceiver apparatus as in Claim
1 wherein:

said audio/video source information comprises
analog audio/video source information;

20 said audio/video transceiver apparatus further
comprises analog to digital converter means for
converting said analog audio/video source information
to corresponding digital audio/video source
information;

25 said compression means is operative for
compressing said corresponding digital audio/video
source information into a digital time compressed
representation thereof having an associated time
period that is shorter than a time period associated
30 with a real time presentation of said digital
audio/video source information; and

said random access storage means is operative



for storing said digital time compressed representation of said corresponding digital audio/video source information.

9. An audio/video transceiver apparatus as in Claim

5 1 wherein:

said audio/video source information comprises digital audio/video source information;

said compression means is operative for compressing said digital audio/video source information into a digital time compressed representation thereof having an associated time period that is shorter than a time period associated with a real time representation of said digital audio/video source information; and

10
15 said random access storage means is operative for storing said digital time compressed representation of said digital audio/video source information.

10. An audio/video transceiver apparatus as in Claim

20 8 wherein said input means is coupled to an external television camera and said analog audio/video source information comprises information received from said external television camera.

11. An audio/video transceiver apparatus as in Claim

25 8 wherein said input means is coupled to an external analog video tape recorder and said analog audio/video source information comprises information received from said external analog video tape recorder.

12. An audio/video transceiver apparatus as in Claim

30 8 wherein said input means is coupled to an external television RF tuner and said analog audio/video source information comprises information received from said external television RF tuner.



13. An audio/video transceiver apparatus as in Claim
8 wherein said input means comprises television RF tuner
means coupled to an external television antenna and said
analog audio/video source information comprises
5 information transmitted by a remotely located television
transmitter.

14. An audio/video transceiver apparatus as in Claim
8 wherein said input means comprises television RF tuner
means coupled to an external cable television system and
10 said analog audio/video source information comprises
information received from said external cable television
system.

15. An audio/video transceiver apparatus as in Claim
9 wherein said input means is coupled to an external
15 computer and said digital audio/video source information
comprises computer-generated audio/video information.

16. An audio/video transceiver apparatus as in Claim
9 wherein said input means comprises a fiber optic input
port coupled to a fiber optic transmission line and said
20 digital audio/video source information comprises
information received over said fiber optic transmission
line.

17. An audio/video transceiver apparatus comprising:
input means for receiving audio/video source
25 information as a time compressed representation
thereof, said time compressed representation of said
audio/video source information being received over an
associated burst time period that is shorter than a
real time period associated with said audio/video
30 source information;

random access storage means, coupled to said
input means, for storing the time compressed



representation of said audio/video source information received by said input means; and

output means, coupled to said random access storage means, for receiving the time compressed representation of said audio/video source information stored in said random access storage means for transmission away from said audio/video transceiver apparatus.

18. An audio/video transceiver apparatus as in Claim 17 wherein:

said input means comprises a fiber optic input port;

said input means is coupled, via a fiber optic transmission line, to a video library, said video library storing a multiplicity of items of audio/video source information in said time compressed representation for selective retrieval, in said associated burst time period over said fiber optic transmission line, by the user.

19. An audio/video transceiver apparatus as in Claim 17 in combination with a video library, coupled via a communication link with said audio/video transceiver apparatus, said video library storing a multiplicity of items of audio/video source information in said time compressed representation for selective retrieval, in said associated burst time period over said communication link.

20. An audio/video transceiver apparatus as in Claim 1 further comprising:

decompression means, coupled to said random access storage means, for selectively decompressing said time compressed representation of said audio/video source information stored in said random access storage means; and

editing means, coupled to said random access



storage means and decompression means, for editing
said selectively decompressed time compressed
representation of said audio/video source
information, and for storing said edited selectively
decompressed time compressed representation of said
audio/video source information in said random access
storage means.

21. An audio/video transceiver apparatus as in Claim
1 further comprising:

decompression means, coupled to said random
access storage means, for selectively decompressing
said time compressed representation of said
audio/video source information stored in said random
access storage means; and

editing means, coupled to said random access
storage means and decompression means, for editing
said selectively decompressed time compressed
representation of said audio/video source
information;

wherein said compression means is operative for
recompressing the edited selectively decompressed
time compressed representation of said audio/video
source information; and

wherein said random access storage means is
operative for storing the recompressed selectively
decompressed time compressed representation of said
audio/video source information.

22. An audio/video transceiver apparatus as in Claim
1 further comprising:

decompression means, coupled to said random
access storage means, for selectively decompressing
the time compressed representation of said
audio/video source information stored in said random
access storage means; and

monitor means for enabling the user to view the



selectively decompressed time compressed
representation of said audio/video source
information.

23. An audio/video transceiver apparatus as in Claim
5 8 further comprising:

decompression means, coupled to said random
access storage means, for selectively decompressing
the digital time compressed representation of said
corresponding digital audio/video source information
10 stored in said random access storage means; and

editing means, coupled to said random access
storage means and decompression means, for editing
the decompressed digital time compressed
representation of said corresponding digital
15 audio/video source information and for then storing
the edited decompressed digital time compressed
representation of said corresponding digital
audio/video source information in said random access
storage means.

20 24. An audio/video transceiver apparatus as in Claim
23 further comprising monitor means for enabling the user
to selectively view the decompressed digital time
compressed representation of said corresponding digital
audio/video source information during editing.

25. 25. An audio/video transceiver apparatus as in Claim
8 further comprising:

decompression means, coupled to said random
access storage means, for selectively decompressing
the digital time compressed representation of said
30 corresponding digital audio/video source information
stored in said random access storage means; and

monitor means, coupled to said decompression
means, for enabling the user to selectively view the
decompressed digital time compressed representation



of said corresponding digital audio/video source information..

26. An audio/video transceiver apparatus as in Claim 9 further comprising:

5 decompression means, coupled to said random access storage means, for selectively decompressing the digital time compressed representation of said digital audio/video source information stored in said random access memory means; and

10 editing means, coupled to said random access storage means and decompression means, for editing the decompressed digital time compressed representation of said digital audio/video source information; wherein

15 said random access storage means thereafter ^{stores} ~~being operative for storing~~ the edited decompressed digital time compressed representation of said digital audio/video source information, ~~in said random access storage means~~

20 27. An audio/video transceiver apparatus as in Claim 26 further comprising monitor means for enabling the user to selectively view the decompressed digital time compressed representation of said digital audio/video source information during editing.

25 28. An audio/video transceiver apparatus as in Claim 9 further comprising:

30 decompression means, coupled to said random access storage means, for selectively decompressing the digital time compressed representation of said digital audio/video source information stored in said random access memory means; and

 monitor means, coupled to said decompression means, for enabling the user to selectively view the decompressed digital time compressed representation

of said digital audio/video source information.

29. An audio/video transceiver apparatus as in Claim 8 further comprising a video tape recorder for providing said analog audio/video source information.

5 30. An audio/video information transfer network comprising:

 a plurality of audio/video transceivers, coupled via one or more communications links, each of said audio/video transceivers comprising:

10 input means for receiving audio/video source information;

 compression means, coupled to said input means, for compressing said audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said audio/video source information;

15 random access storage means, coupled to said compression means, for storing the time compressed representation of said audio/video source information; and

20 output means, coupled to said random access storage means and to one of said one or more communications links, for receiving the time compressed format representation of said audio/video source information stored in said random access storage means for transmission in said burst time period to another one of said plurality of

25 audio/video transceivers.

30

31. An audio/video information transfer network as in Claim 30 wherein said input means of one of said plurality of audio/video transceivers comprises a fiber optic input port, said output means of another one of said



plurality of audio/video transceivers comprises a fiber optic output port, and one of said one or more communication links comprises a fiber optic transmission line coupled between said fiber optic input port and said
5 fiber optic output port.

32. An audio/video information transfer network as in Claim 30 wherein said output means of one of said plurality of audio/video transceivers comprises a modem and one of said one or more communications links comprises
10 a telephone transmission line.

33. An audio/video information transfer network as in Claim 30 wherein said random access storage means comprises an optical disc memory.

34. An audio/video information transfer network as
15 in Claim 30 wherein said random access storage means comprises a semiconductor memory.

35. An audio/video information transfer network as in Claim 30 wherein said random access storage means of one of said plurality of audio/video transceivers stores a
20 library comprising a multiplicity of items of audio/video source information in said time compressed representation for selective transmission in said associated burst time period to another one of said audio/video transceivers.

36. An audio/video information transfer network as
25 in Claim 30 wherein at least one of said audio/video transceivers further comprises recording means, including a removable recording medium, coupled to said random access storage means, for storing the time compressed representation of said audio/video source information
30 stored in said random access storage means onto said removable recording medium.



37. An audio/video information transfer network as in Claim 30 wherein at least one of said audio/video transceivers further comprises:

5 decompression means, coupled to said random access storage means, for decompressing the time compressed representation of said audio/video source information stored in said random access storage means; and

10 recording means, including a removable recording medium, coupled to said decompression means, for storing the decompressed time compressed format representation of said audio/video source information onto said removable recording medium.

38. An audio/video information transfer network as 15 in Claim 36 wherein said recording means comprises a video tape recorder and said removable recording medium comprises magnetic tape.

39. An audio/video information transfer network as in Claim 37 wherein said recording means comprises a video 20 tape recorder and said removable recording medium comprises magnetic tape.

40. An audio/video information transfer network as in Claim 36 wherein said recording means comprises a write once read many (WORM) optical disc drive and said 25 removable recording medium comprises one or more WORM discs.

41. An audio/video information transfer network as in Claim 37 wherein said recording means comprises a write once read many (WORM) optical disc drive and said 30 removable recording medium comprises one or more WORM discs.

42. An audio/video information transfer network as



in Claim 36 wherein said recording means comprises an erasable optical disc drive and said hard copy storage medium comprises one or more erasable optical discs.

43. An audio/video information transfer network as
5 in Claim 37 wherein said recording means comprises an erasable optical disc drive and said hard copy storage medium comprises one or more erasable optical discs.

44. An audio/video transceiver apparatus as in Claim
1 further comprising recording means, including a
10 removable recording medium, coupled to said random access storage means, for storing the time compressed representation of said audio/video source information stored in said random access storage means onto said removable recording medium.

15 45. An audio/video transceiver apparatus as in Claim 2 further comprising recording means, including a removable recording medium, coupled to said random access storage means, for storing the edited time compressed representation of said audio/video source information
20 stored in said random access storage means onto said removable recording medium.

46. An audio/video transceiver apparatus as in Claim
45 further comprising monitor means for enabling the user to selectively view the time compressed representation of
25 said audio/video source information stored on said removable recording medium.

47. An audio/video transceiver apparatus as in Claim
17 further comprising recording means, including a removable recording medium, coupled to said random access
30 storage means, for storing the time compressed representation of said audio/video source information stored in said random access storage means onto said

removable recording medium.

48. An audio/video transceiver apparatus as in Claim 20 further comprising recording means, including a removable recording medium, coupled to said random access storage means, for storing the edited decompressed time compressed representation of said audio/video source information stored in said random access storage means.

49. An audio/video transceiver apparatus as in Claim 1 further comprising:
10 decompression means, coupled to said random access storage means, for selectively decompressing the time compressed representation of said audio/video source information stored in said random access storage means; and
15 recording means, including a removable recording medium, coupled to said decompression means, for storing the selectively decompressed time compressed representation of said audio/video source information stored in said random access storage means.

20. 50. An audio/video transceiver apparatus as in Claim 22 further comprising:
 recording means, including a removable recording medium, coupled to said decompression means, for storing the selectively decompressed time compressed representation of said audio/video source information on said ~~hard copy storage~~ ^{removable recording} medium; and
 wherein said monitor means is operative for enabling the user to view the selectively decompressed time compressed representation of said audio/video source information stored on said removable recording medium.
30

51. An audio/video transceiver apparatus as in Claim 9 further comprising CD-ROM means for providing said



digital audio/video source information.

52. An audio/video transceiver apparatus as in Claim 9 further comprising erasable optical disc means for providing said digital audio/video source information.

5 53. An audio/video transceiver apparatus as in Claim 17 wherein:

said input means comprises television RF tuner means; and

10 said audio/video source information comprises a time compressed representation thereof transmitted by a remotely located television transmitter.

54. An audio/video transceiver apparatus as in Claim 1 further comprising external video tape recorder means, coupled to said output means, for storing the time
15 compressed representation of said audio/video source information stored in said random access storage means onto magnetic tape.

55. An audio/video transceiver apparatus as in Claim 2 further comprising external video tape recorder means,
20 coupled to said output means, for storing the edited time compressed representation of said audio/video source information stored in said random access storage means onto magnetic tape.

56. An audio/video transceiver apparatus as in Claim
25 17 further comprising external video tape recorder means, coupled to said output means, for storing the time compressed representation of said audio/video source information stored in said random access storage means onto magnetic tape.

57. An audio/video transceiver apparatus as in Claim



20 further comprising external ^{audio/}video tape recorder means,
coupled to said output means, for storing the edited
decompressed time compressed representation of said
audio/video source information stored in said random
5 access storage means onto magnetic tape.

58. An audio/video transceiver apparatus as in Claim
1 further comprising:

10 decompression means, coupled to said random
access storage means, for selectively decompressing
the time compressed representation of said
audio/video source information stored in said random
access storage means; and

15 external ^{audio/}video tape recorder means, coupled to
said output means, for storing the selectively
decompressed time compressed representation of said
audio/video source information stored in said random
access storage means.

59. An audio/video transceiver apparatus as in Claim
22 further comprising external ^{audio/}video tape recorder means,
20 coupled to said output means, for storing the selectively
decompressed time compressed representation of said
audio/video source information onto magnetic tape.

60. An audio/video transceiver apparatus comprising:
25 input means for receiving analog and/or digital
audio/video source information;

analog to digital converter means for converting
analog audio/video source information received at
said input means to corresponding digital audio/video
source information;

30 digital to analog converter means for converting
digital audio/video source information received at
said input means to corresponding analog audio/video
source information;

compressor/decompressor means for compressing



digital audio/video source information received at
said input means or said corresponding digital
audio/video source information received from said
analog to digital converter means into a time
5 compressed representation of said digital or corres-
ponding digital audio/video source information, said
time compressed representation having an associated
time period that is shorter than a time period
associated with a real time representation of said
10 digital or corresponding digital audio/video source
information, said compressor/decompressor means being
further operative for decompressing said time
compressed representation into a decompressed real
time representation of said digital or corresponding
15 digital audio/video source information;

central processing unit means for controlling
operation of said compressor/decompressor means;

random access storage means for storing said
time compressed representation of said digital or
20 corresponding digital audio/video source information
and for storing said decompressed real time
representation of said digital or corresponding
digital audio/video source information;

controller means for enabling communication
25 between said compressor/decompressor means, said
central processing unit means, and said random access
memory means; and

output means for receiving said time compressed
representation of said digital or corresponding
30 digital audio/video source information stored in said
random access storage means for transmission away
from said audio/video transceiver apparatus.

61. An audio/video transceiver apparatus as in Claim
60 further comprising time base generator means for
35 supplying timing information for association with said
time compressed representation of said digital or



corresponding digital audio/video source information.

62. An audio/video transceiver apparatus as in Claim
60 further comprising audio/video recording means,
including a recording medium, for recording said analog or
5 corresponding analog audio/video source information onto
said recording medium.

63. An audio/video transceiver apparatus as in Claim
60 further comprising audio/video recording means,
including a recording medium, for recording said digital
10 or corresponding digital audio/video source information
onto said recording medium.

64. An audio/video transceiver apparatus as in Claim
62 wherein said recording medium comprises magnetic tape.

65. An audio/video transceiver apparatus as in Claim
15 63 wherein said recording medium comprises magnetic tape.

66. An audio/video transceiver apparatus as in Claim
63 wherein said recording medium comprises a CD-ROM.

67. An audio/video transceiver apparatus as in Claim
63 wherein said recording medium comprises a WORM optical
20 disc.

68. An audio/video transceiver apparatus as in Claim
63 wherein said recording medium comprises an erasable
optical disc.

69. An audio/video transceiver apparatus as in Claim
25 60 further comprising audio/video recording and playback
means coupled to said input means for providing said
analog and/or digital audio/video source information.

70. An audio/video transceiver apparatus as in Claim



60 further comprising high speed bus means coupled to said input means, and wherein said input means comprises auxiliary digital input means for receiving said digital audio/video source information.

5 71. An audio/video transceiver apparatus as in Claim 70 wherein said high speed bus means comprises an optical bus.

72. An audio/video transceiver apparatus as in Claim 60 further comprising high speed bus means coupled to said
10 input means, and wherein said input means comprises fiber optic means for receiving said digital audio/video source information.

73. An audio/video transceiver apparatus as in Claim 60 further comprising high speed bus means, and wherein
15 said analog to digital converter means, digital to analog converter means, compressor/decompressor means, central processing unit means, and controller means are coupled to said random access storage means via said high speed bus means.

20 74. An audio/video transceiver apparatus as in Claim 60 further comprising:

digital control unit means, said digital control unit means comprising:

25 additional central processing unit means;
read-only memory means coupled to said additional central processing unit means for storing microinstructions defining a plurality of selected editing functions; and

30 additional controller means for enabling communication between said additional central processing unit means and said read-only memory means; and

said additional central processing unit means



being operative for selectively executing the microinstructions stored in said read-only memory means to perform one or more of said plurality of selected editing functions.

5 75. An audio/video transceiver apparatus as in Claim 74 wherein said digital control unit means is coupled to said random access storage means.

76. An audio/video transceiver apparatus as in Claim 73 further comprising RGB converter means for converting
10 information stored in said random access storage means to an RGB format, and wherein said output means comprises RGB output means for receiving RGB format information from said RGB converter means.

77. An audio/video transceiver apparatus as in Claim
15 73 wherein said output means comprises audio/video transmitter/receiver means coupled to said high speed bus for receiving said time compressed representation of said digital or corresponding digital audio/video source information stored in said random access storage means for
20 transmission away from said audio/video transceiver apparatus.

78. An audio/video transceiver apparatus as in Claim 77 wherein said audio/video transmitter/receiver means comprises a modem for coupling to a telephone transmission
25 line.

79. An audio/video transceiver apparatus as in Claim 77 wherein said audio/video transmitter/receiver means comprises a fiber optic transceiver for coupling to a fiber optic transmission line.

30

80. An audio/video transceiver apparatus as in Claim



1 further comprising editing means, coupled to said random
access storage means, for editing said time compressed
representation of said audio/video source information and
for then storing the edited time compressed representation
5 of said audio/video source information in said random
access storage means.

81. An audio/video transceiver apparatus as in Claim
1 wherein said input means and output means comprises
microwave transceiver means, coupled to a microwave link,
10 for receiving said audio/video source information over
said microwave link and for transmitting said time
compressed audio/video source information stored in said
random access storage means over said microwave link.

82. An audio/video transceiver apparatus as in Claim
15 1 wherein said random access storage means comprises a
bubble memory.

83. An audio/video transceiver apparatus as in Claim
1 wherein said random access storage means comprises
digital paper.

20 84. An audio/video transceiver apparatus as in Claim
1 wherein said random access storage means comprises one
or more magnetic disks.

85. An audio/video transceiver apparatus as in Claim
17 wherein said input means and output means comprises
25 microwave transceiver means coupled, via a microwave link,
to a video library, said video library storing a
multiplicity of items of audio/video source information in
said time compressed digital representation for selective
retrieval, in said associated burst time period, over said
30 microwave link, said microwave transceiver means being
further operative for transmitting said time compressed
representation of said audio/video information stored in



said random access storage means over said microwave link.

86. An audio-video transceiver apparatus substantially as hereinbefore described with reference to the drawings.

87. An audio-video information transfer network substantially as hereinbefore described with reference to the drawings.

DATED this TENTH day of OCTOBER 1990

Richard A. Lang

Patent Attorneys for the Applicant

SPRUSON & FERGUSON



88. A method for handling audio/video source information, the method comprising:

receiving audio/video source information;

compressing the received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of the received audio/video source information;

storing said time compressed representation of the received audio/video source information; and

transmitting, in said burst time period, the stored time compressed representation of the received audio/video source information to a selected destination.

89. A method as in claim 88 further comprising the steps of:

editing the stored time compressed representation of said audio/video source information; and

storing the edited time compressed representation of said audio/video source information.

90. A method as in claim 89 further comprising the step of monitoring the stored, time compressed representation of said audio/video source information during editing.

91. A method as in claim 88 wherein the step of transmitting comprises transmitting said time compressed representation of said audio-video source information over an optical channel.

92. A method as in claim 88 wherein the step of transmitting comprises transmitting said time compressed representation of said audio-video source information over a telephone transmission channel.

93. A method as in claim 88 wherein the step of storing comprises

storing the time compressed representation of said audio/video source information on an optical disk.

94. A method as in claim 88 wherein the step of storing comprises storing the time compressed representation of said audio/video source information in a semiconductor memory.

95. A method as in claim 88 wherein:

said audio/video source information comprises analog audio/video source information;

said method further comprises the step of converting said analog audio/video source information to corresponding digital audio/video source information;

said step of compressing comprises compressing said corresponding digital audio/video source information into a digital time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said digital audio/video source information; and

said step of storing comprises storing said digital time compressed representation of said corresponding digital audio/video source information.

96. A method as in claim 88 wherein:

said audio/video source information comprises digital audio/video source information;

said step of compressing comprises compressing said digital audio/video source information into a digital time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said digital audio/video source information; and

said step of storing comprises storing said digital time compressed



representation of said digital audio/video source information.

97. A method as in claim 95 wherein said audio/video source information comprises information received from a television camera.

98. A method as in claim 95 wherein said audio/video source information comprises information received from an analog video tape recorder.

99. A method as in claim 95 wherein said audio/video source information comprises information received from a television RF tuner.

100. A method as in claim 95 wherein said audio/video source information comprises information transmitted by a remotely located television transmitter.

101. A method as in claim 95 wherein said audio/video source information comprises information received from a cable television system.

102. A method as in claim 96 wherein said audio/video source information comprises information received from a computer.

103. A method as in claim 96 wherein said audio/video source information comprises information received over a fiber optic transmission line.

104. A method for handling audio/video source information, the method comprising:

receiving audio/video source information as a time compressed representation thereof, said time compressed representation of said audio/video source information being received over an associated burst time period that is shorter than a real time period associated with real time playback of said audio/video source information;

storing the time compressed representation of said received audio/video source information; and

transmitting, in said burst time period, the stored time compressed



representation of said received audio/video source information to a selected destination.

105. A method as in claim 104 wherein said audio/video source information comprises information received over an optical channel from a video library storing a multiplicity of programs of audio/video source information as time compressed representations thereof for selective retrieval by a user in an associated burst time period.

106. A method as in claim 104 wherein said audio/video source information comprises information received over a communications link from a video library storing a mutlitplicity of programs of audio/video source information as time compressed representations thereof for selective retrieval by a user in an associated burst time period.

107. A method as in claim 88 further comprising the steps of:

selectively decompressing the stored time compressed representation of said audio/video source information;

editing the selectively decompressed time compressed representation of said audio/video source information; and

storing the edited selectively decompressed time compressed representation of said audio/video source information.

108. A method as in claim 88 further comprising the steps of:

selectively decompressing the stored time compressed representation of said audio/video source information;

editing the selectively decompressed time compressed representation of said audio/video source information;

recompressing the edited selectively decompressed time compressed representation of said audio/video source information; and

storing the recompressed edited selectively decompressed time



compressed representation of said audio/video source information.

109. A method as in claim 88 further comprising the steps of:

selectively decompressing the stored time compressed representation of said audio/video source information; and

visually displaying the selectively decompressed time compressed representation of said audio/video source information for viewing by a user.

110. A method as in claim 95 further comprising the steps of:

selectively decompressing the stored digital time compressed representation of said corresponding digital audio/video source information;

editing the selectively decompressed digital time compressed representation of said corresponding digital audio/video source information; and

storing the edited selectively decompressed digital time compressed representation of said corresponding digital audio/video source information.

111. A method as in claim 110 further comprising the step of visually displaying the selectively decompressed digital time compressed representation of said corresponding digital audio/video source information for selective viewing by a user during editing.

112. A method as in claim 95 further comprising the steps of:

selectively decompressing the stored digital time compressed representation of said corresponding digital audio/video source information; and

visually displaying the selectively decompressed digital time compressed representation of said corresponding digital audio/video source information for selective viewing by a user.

113. A method as in claim 96 further comprising the steps of:

selectively decompressing the stored digital time compressed



representation of said digital audio/video source information;

editing the selectively decompressed digital time compressed representation of said digital audio/video source information; and

storing the edited selectively decompressed digital time compressed representation of said digital audio/video source information.

114. A method as in claim 113 further comprising the step of visually displaying the selectively decompressed digital time compressed representation of said digital audio/video source information for selective viewing by a user during editing.

115. A method as in claim 96 further comprising the steps of:
selectively decompressing the stored digital time compressed representation of said digital audio/video source information; and

visually displaying the selectively decompressed digital time compressed representation of said digital audio/video source information for selective viewing by a user.

116. A method as in claim 95 wherein said analog audio/video source information is received from a video tape recorder.

117. A method for handling audio/video source information, the method comprising:

providing a network that includes a plurality of audio/video transceivers, coupled via one or more communication links;

receiving audio/video source information at one or more of said plurality of audio/video transceivers;

compressing said received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said received audio/video source information;



storing the time compressed representation of the received audio/video source information; and

transmitting, in said burst time period, the stored time compressed representation of the received audio/video source information to one or more of said plurality of audio/video transceivers.

118. A method as in claim 117 wherein said audio/video source information is received over one or more optical transmission channels and the stored time compressed representation of the received audio/video source information is transmitted over one or more optical transmission channels.

119. A method as in claim 117 wherein the stored time compressed representation of the received audio/video source information is transmitted over one or more telephone transmission channels.

120. A method as in claim 117 wherein the time compressed representation of the received audio/video source information is stored in an optical disk memory.

121. A method as in claim 117 wherein the time compressed representation of the received audio/video source information is stored in a semiconductor memory.

122. A method as in claim 117 wherein one of said plurality of audio/video transceivers stores a library containing a multiplicity of programs of audio/video source information as time compressed representations thereof for selective transmission, in an associated burst time period, to one or more of the remaining plurality of audio/video transceivers.

123. A method as in claim 117 further comprising the step of recording the stored time compressed representation of said audio/video source information onto a removable recording medium.

124. A method as in claim 117 further comprising the steps of:

decompressing the stored time compressed representation of said audio/video source information; and

recording the decompressed time compressed representation of said audio/video source information onto a removable storage medium.

125. A method as in claim 123 wherein the stored time compressed representation of said audio/video source information is recorded onto a magnetic tape within a video tape recorder.

126. A method as in claim 124 wherein the stored time compressed representation of said audio/video source information is recorded onto a magnetic tape within a video tape recorder.

127. A method as in claim 123 wherein the stored time compressed representation of said audio/video source information is recorded onto one or more write-once read-many (WORM) optical disks within an optical disk drive.

128. A method as in claim 124 wherein the stored time compressed representation of said audio/video source information is recorded onto one or more write-once read-many (WORM) optical disks within an optical disk drive.

129. A method as in claim 123 wherein the stored time compressed representation of said audio/video source information is recorded onto one or more erasable optical disks within an optical disk drive.

130. A method as in claim 124 wherein the stored time compressed representation of said audio/video source information is recorded onto one or more erasable optical disks within an optical disk drive.

131. A method as in claim 88 further comprising the step of recording the stored time compressed representation of said audio/video source information onto a removable recording medium.

132. A method as in claim 89 further comprising the step of recording the edited time compressed representation of said audio/video source



information onto a removable recording medium.

133. A method as in claim 132 further comprising the step of visually displaying the time compressed representation of said audio/video source information stored on said removable recording medium for selective viewing by a user.

134. A method as in claim 104 further comprising the step of recording the time compressed representation of said audio/video source information onto a removable recording medium.

135. A method as in claim 107 further comprising the step of recording the edited decompressed time compressed representation of said audio/video source information onto a removable recording medium.

136. A method as in claim 88 further comprising the steps of:
selectively decompressing the stored time compressed representation of said audio/video source information; and

recording the selectively decompressed time compressed representation of said audio/video source information onto a removable recording medium.

137. A method as in claim 109 further comprising the steps of:
recording the selectively decompressed time compressed representation of said audio/video source information onto a removable recording medium; and
visually displaying the selectively decompressed time compressed representation of said audio/video source information for viewing by a user.

138. A method as in claim 96 wherein said digital audio/video source information is received from a CD-ROM.

139. A method as in claim 96 wherein said digital audio/video source information is received from an erasable optical disk.

140. A method as in claim 104 wherein said audio/video source information comprises information received from a television RF tuner.

141. A method as in claim 88 further comprising the step of recording the stored time compressed representation of said audio/video source information onto a magnetic recording medium.

142. A method as in claim 89 further comprising the step of recording the stored edited time compressed representation of said audio/video source information onto a magnetic recording medium.

143. A method as in claim 104 further comprising the step of recording the stored time compressed representation of said audio/video source information onto a magnetic recording medium.

144. A method as in claim 107 further comprising the step of recording the edited decompressed time compressed representation of said audio/video source information onto a magnetic recording medium.

145. A method as in claim 88 further comprising the steps of:
selectively decompressing the stored time compressed representation of said audio/video source information; and

recording the selectively decompressed stored time compressed representation of said audio/video source information onto a magnetic storage medium.

146. A method as in claim 109 further comprising the step of recording the selectively decompressed time compressed representation of said audio/video source information onto a magnetic recording medium.

147. A method for handling analog and/or digital audio/video source information, the method comprising the steps of:

receiving analog and/or digital audio/video source information;

converting received analog audio/video source information to

corresponding digital audio/video source information;

converting received digital audio/video source information to



corresponding analog audio/video source information;

compressing said received digital or converted corresponding digital audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said received digital or converted corresponding digital audio/video source information;

storing said time compressed representation;

decompressing said time compressed representation into a real time representation of said received digital or converted corresponding digital audio/video source information;

storing said real time representation; and

transmitting said time compressed representation to a selected destination.

148. A method as in claim 147 further comprising the step of supplying timing information for association with said said time compressed representation.

149. A method as in claim 147 further comprising the step of recording said received analog or corresponding analog audio/video source information onto a recording medium.

150. A method as in claim 147 further comprising the step of recording said received digital or corresponding digital audio/video source information onto a recording medium.

151. A method as in claim 149 wherein said received analog or corresponding analog audio/video source information is recorded onto a magnetic tape recording medium.

152. A method as in claim 150 wherein said received digital or corresponding digital audio/video source information is recorded onto a



magnetic tape recording medium.

153. A method as in claim 150 wherein said received digital or corresponding digital audio/video source information is recorded onto a CD-ROM.

154. A method as in claim 150 wherein said received digital or corresponding digital audio/video source information is recorded onto a WORM optical disk.

155. A method as in claim 150 wherein said received digital or corresponding digital audio/video source information is recorded onto an erasable optical disk.

156. A method as in claim 147 wherein said received analog and/or digital audio/video source information is received from an audio/video recording and playback apparatus.

157. A method as in claim 147 wherein said digital audio/video source information is received over a high speed bus.

158. A method as in claim 147 wherein said digital audio/video source information is received over an optical bus.

159. A method as in claim 147 further comprising the step of selectively editing the received analog and/or digital audio/video source information.

160. A method for handling audio/video source information, the method comprising:

receiving audio/video source information comprising a multiplicity of video frames in the form of one or more full motion video programs;

compressing said received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of



said received audio/video source information;

storing the time compressed representation of said received audio/video source information; and

transmitting, over a microwave channel, in said burst time period, the stored time compressed representation of said received audio/video source information to a selected destination.

161. A method for handling audio/video source information, the method comprising:

receiving audio/video source information comprising a multiplicity of video frames in the form of one or more full motion video programs;

compressing said received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said received audio/video source information;

storing the time compressed representation of said received audio/video source information in a bubble memory; and

transmitting, in said burst time period, the stored time compressed representation of said received audio/video source information to a selected destination.

162. A method for handling audio/video source information, the method comprising:

receiving audio/video source information comprising a multiplicity of video frames in the form of one or more full motion video programs;

compressing said received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said received audio/video source information;



storing the time compressed representation of said received audio/video source information in a digital paper memory; and

transmitting, in said burst time period, the stored time compressed representation of said received audio/video source information to a selected destination.

163. A method for handling audio/video source information, the method comprising:

receiving audio/video source information comprising a multiplicity of video frames in the form of one or more full motion video programs;

compressing said received audio/video source information into a time compressed representation thereof having an associated burst time period that is shorter than a time period associated with a real time representation of said received audio/video source information;

storing the time compressed representation of said received audio/video source information on one or more magnetic disks; and

transmitting, in said burst time period, the stored time compressed representation of said received audio/video source information to a selected destination.

164. A method for handling audio/video source information, the method comprising:

receiving audio/video source information as a time compressed digital representation thereof, said audio/video source information comprising a multiplicity of video frames in the form of one or more full motion video programs selected from a video library storing a multiplicity of full motion video programs in a time compressed digital representation thereof for selective retrieval, said time compressed digital representation of the received audio/video source information being received in an associated burst



time period that is shorter than a time period associated with a real time representation of said received audio/video source information;

storing the time compressed digital representation of said received audio/video source information; and


transmitting, in said burst time period, the stored time compressed digital representation of said received audio/video source information to a selected destination.

DATED this FOURTH day of JUNE 1992

Richard A. Lang



Patent Attorneys for the Applicant
SPRUSON & FERGUSON



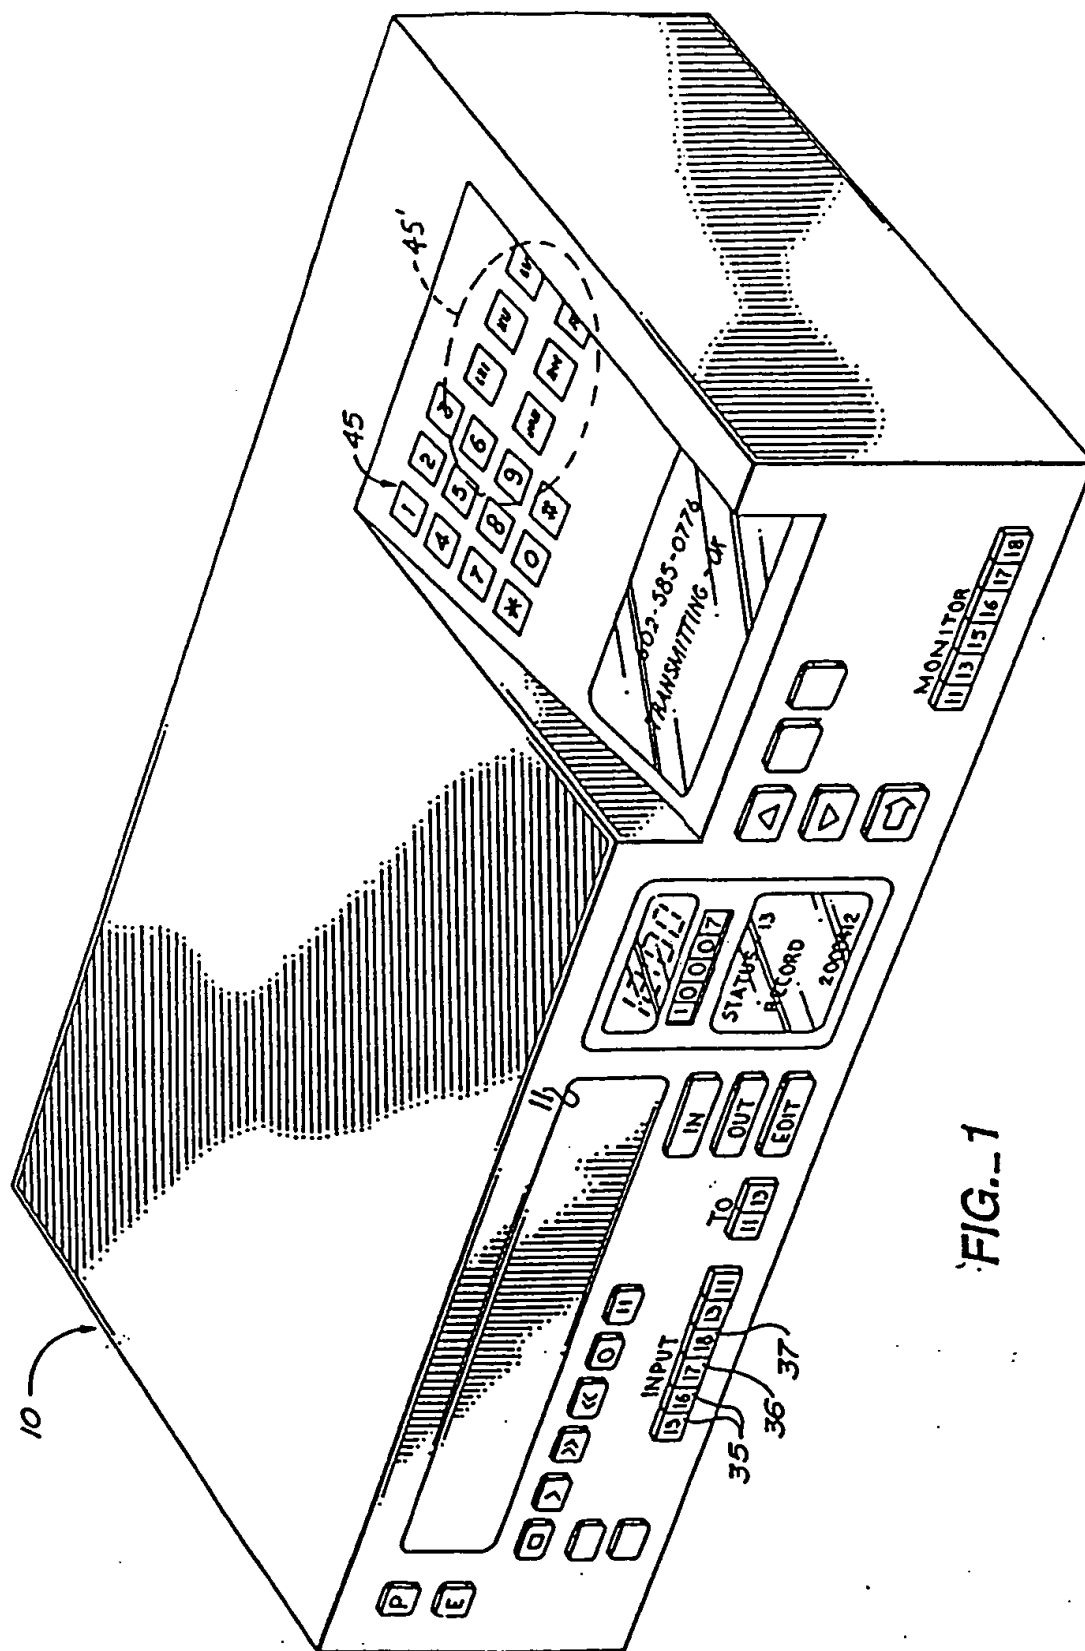

SUBSTITUTE SHEET

2/6

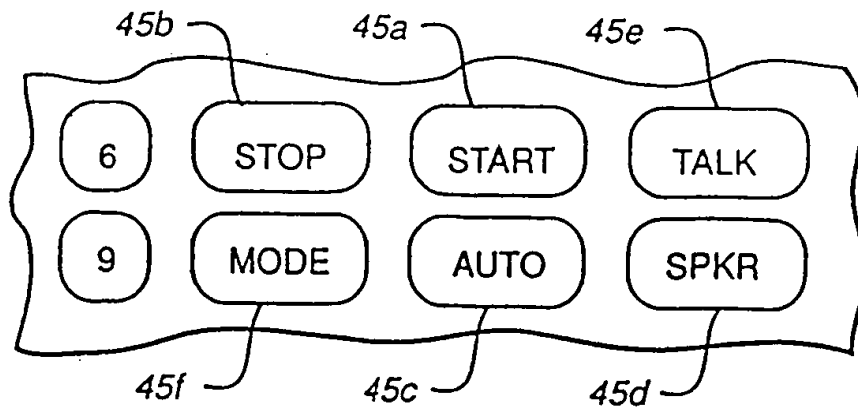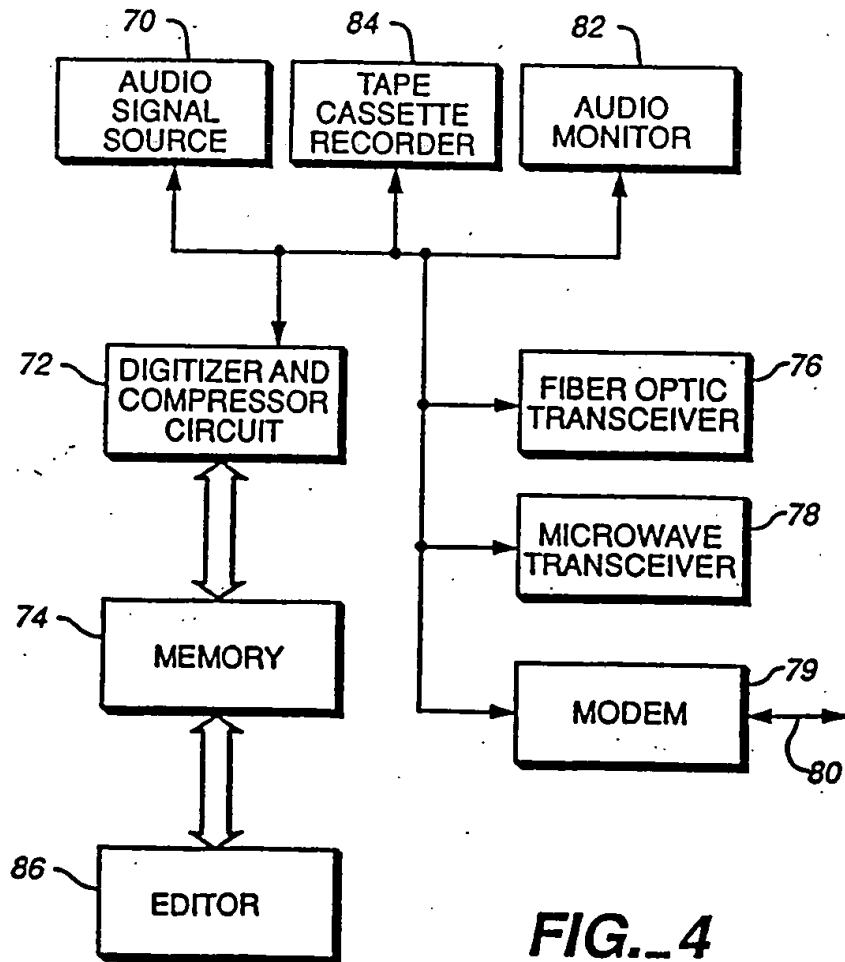**FIG. 1A****FIG. 4**

SUBSTITUTE SHEET

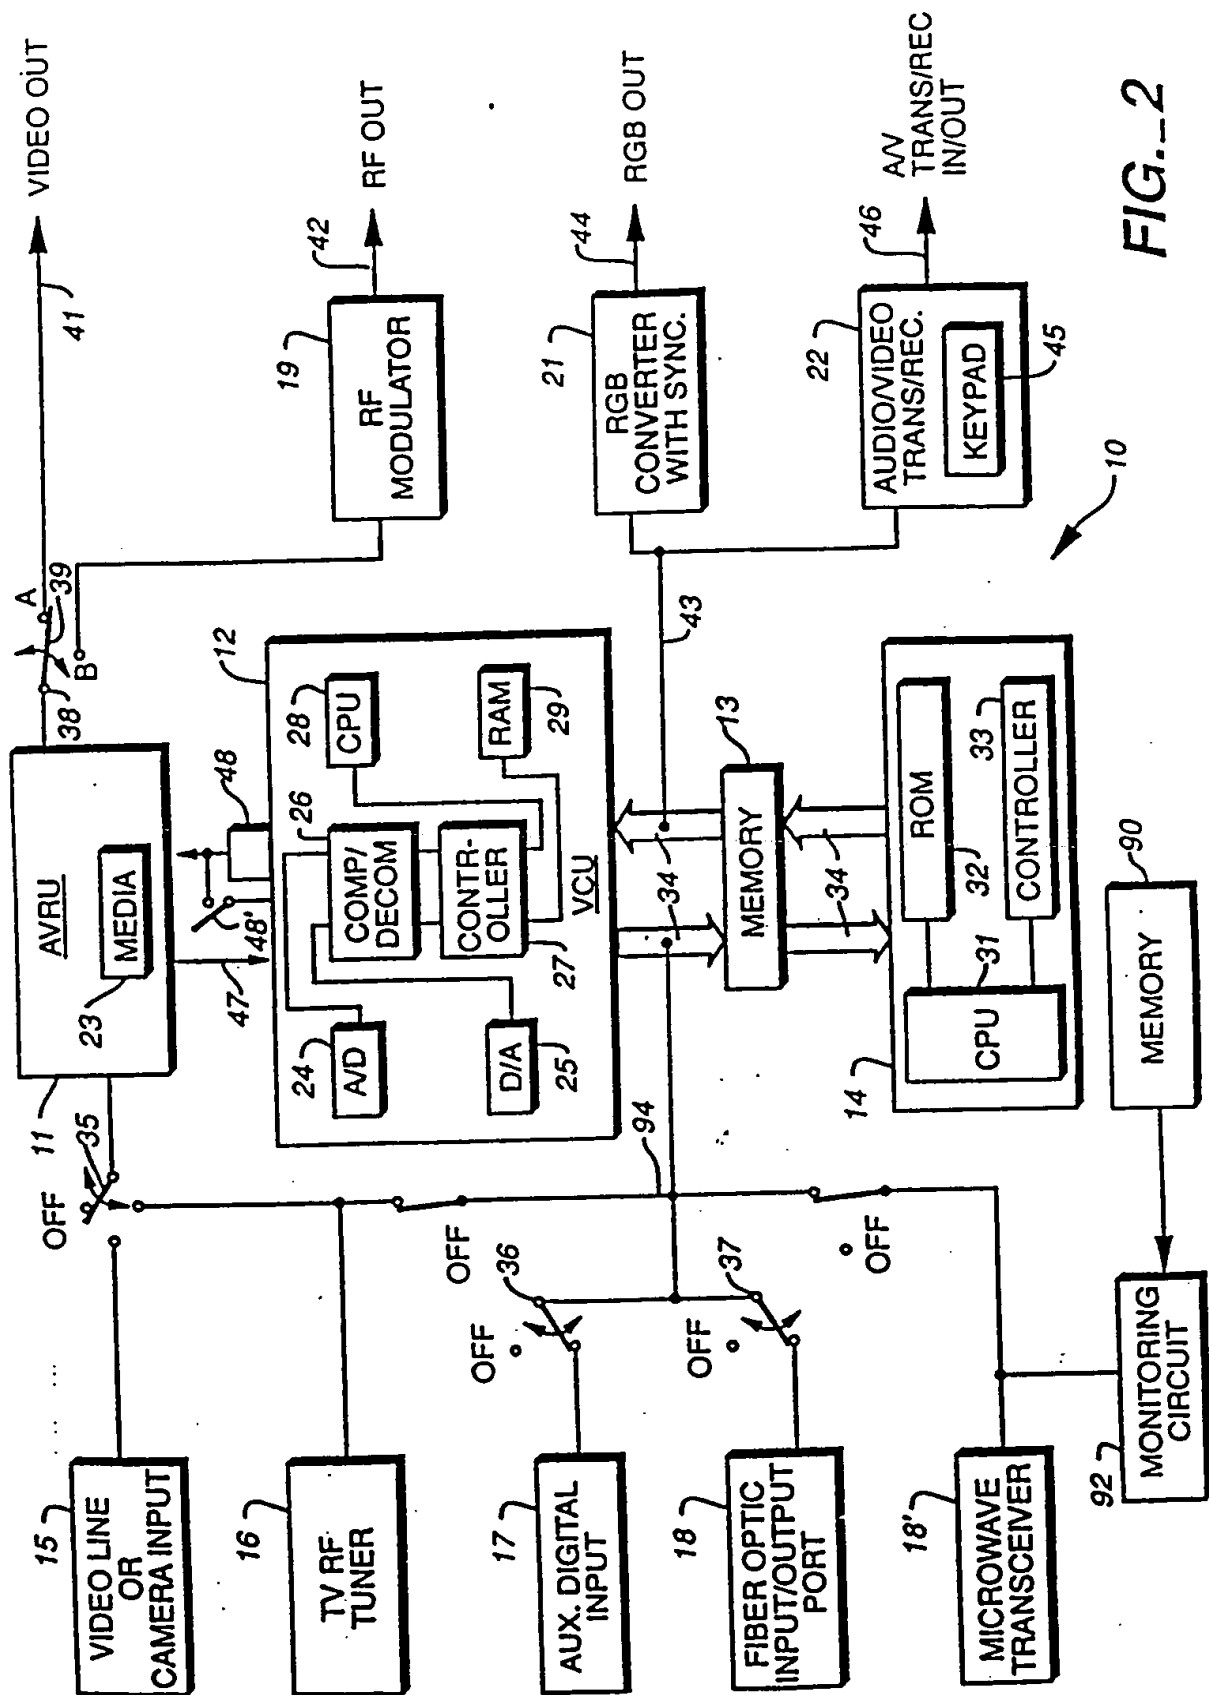


FIG. 2

SUBSTITUTE SHEET


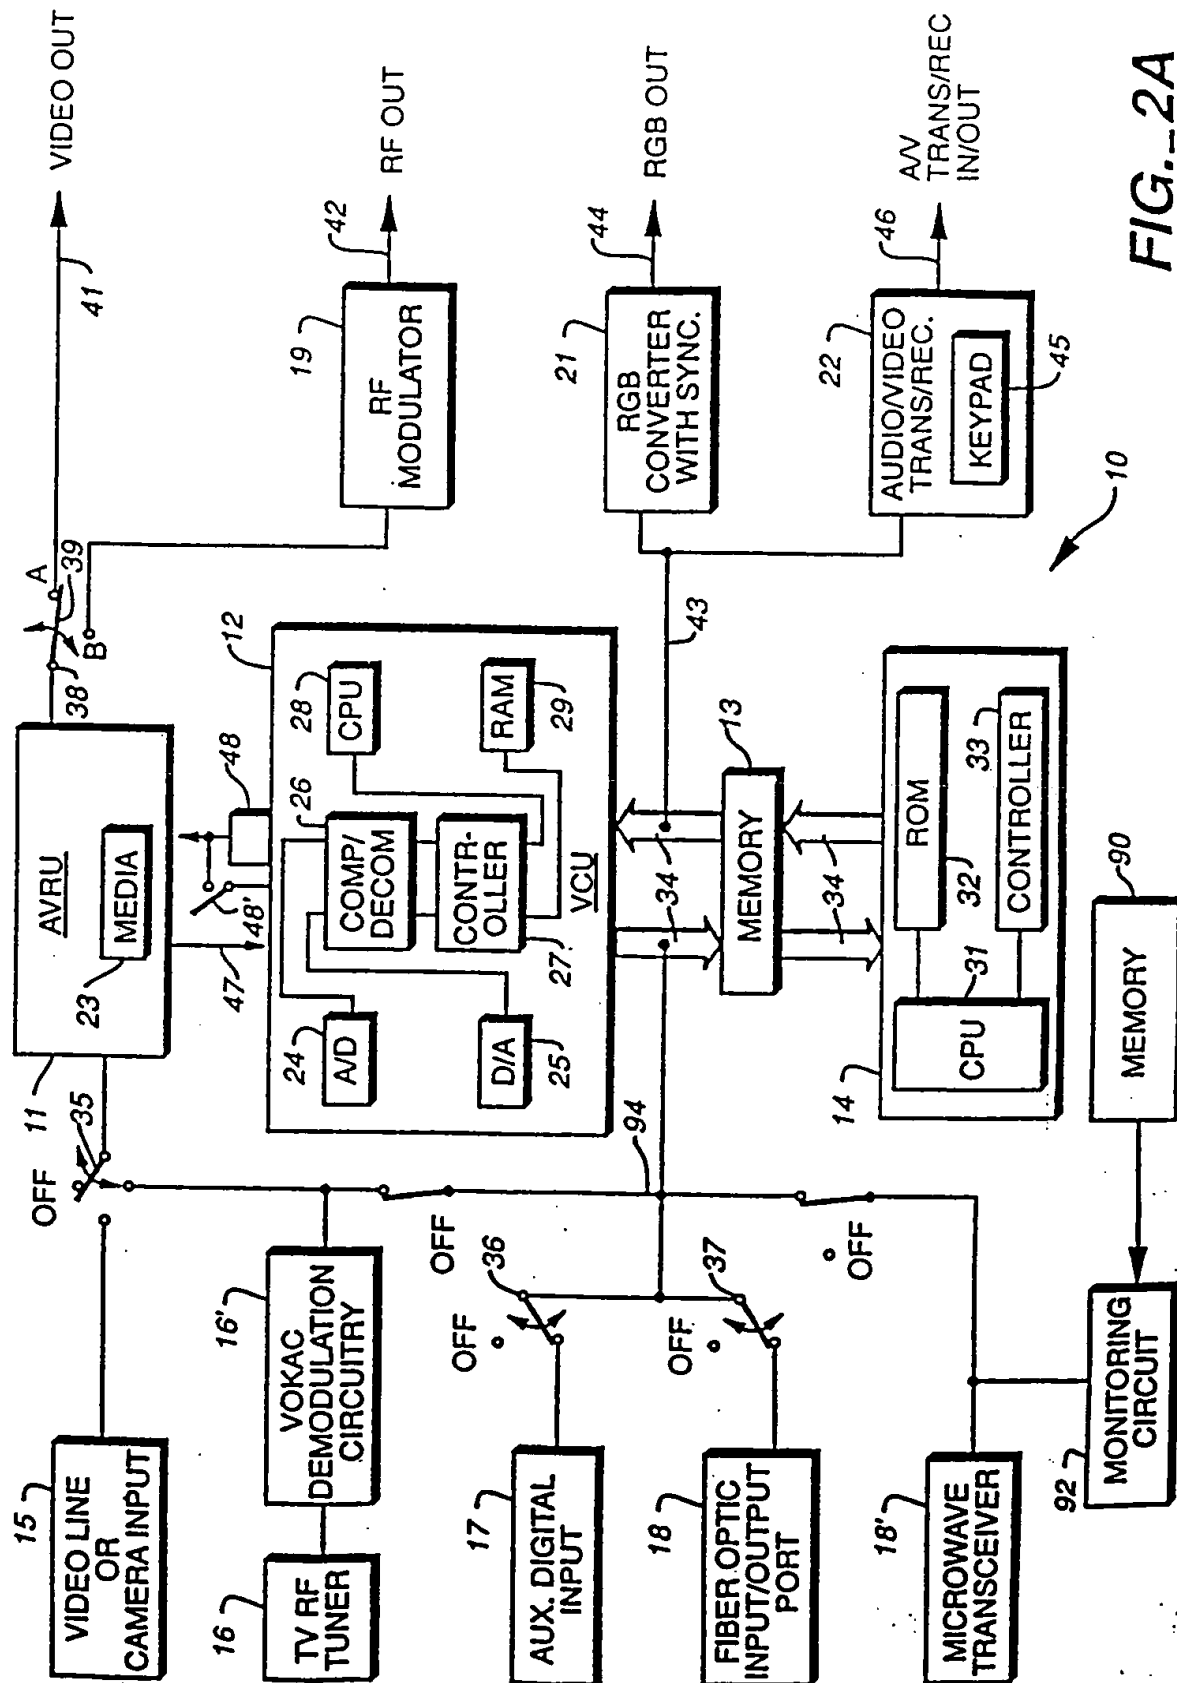




FIG. 2A

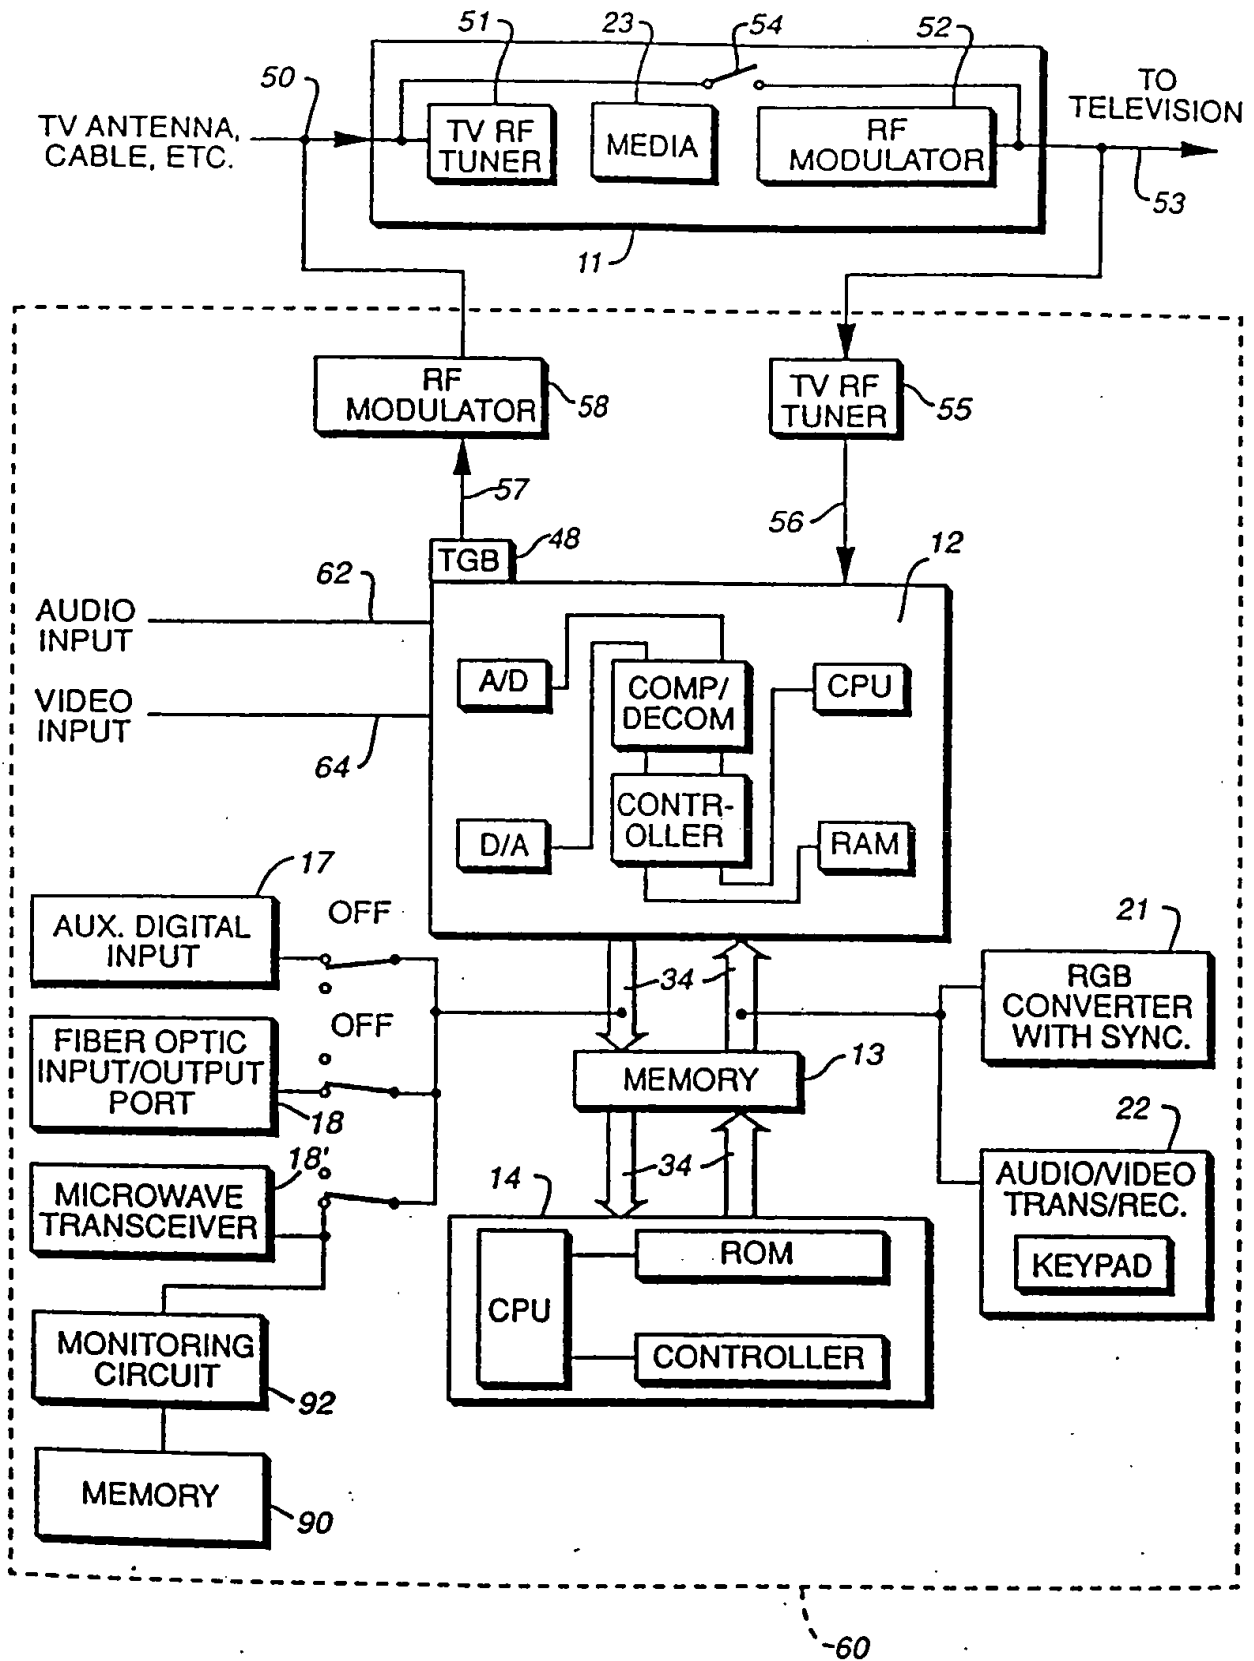

SUBSTITUTE SHEET

FIG. 3

6/6

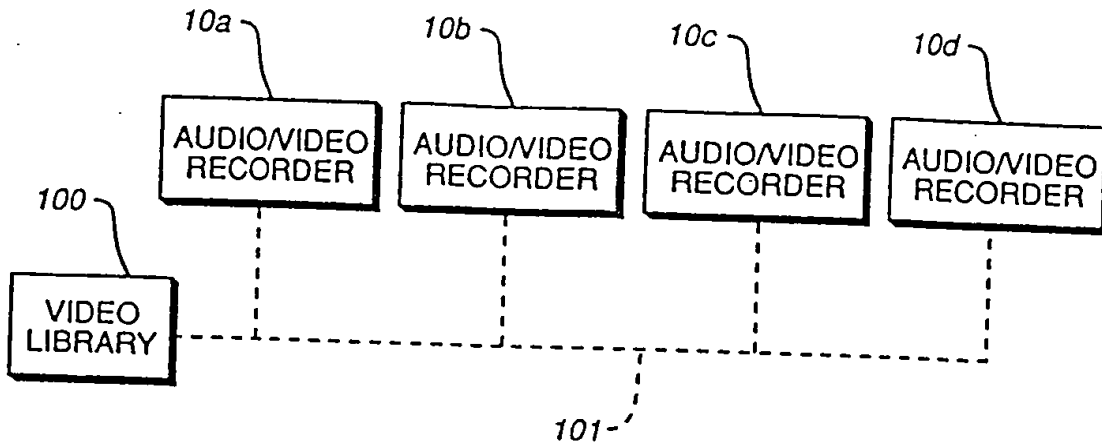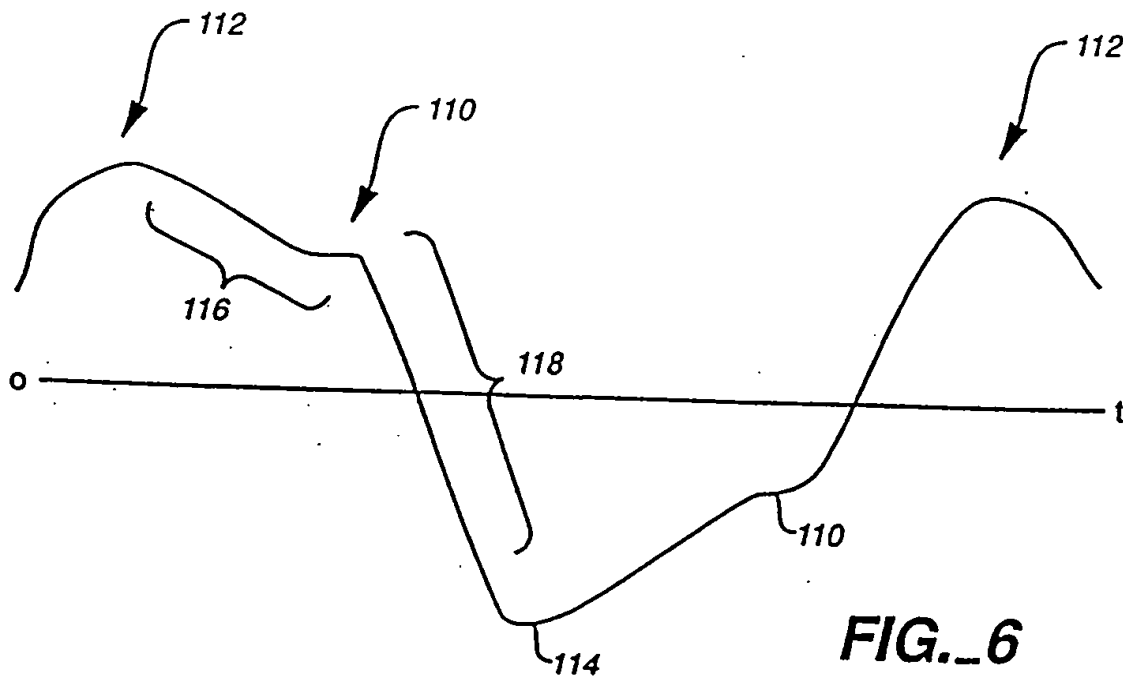**FIG. 5****FIG. 6**

SUBSTITUTE SHEET